

Free Questions for H31-311 by braindumpscollection

Shared by Rivera on 15-04-2024

For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Question Type: MultipleChoice

When an optical fiber between node A and node B is broken, the FIU on node B detects the OTS_LOS alarm and inserts the OTS_BDI alarm to node

Options:

- A- The FIU on node A reports the OTS_BDI alarm. The line board on the downstream C node reports the OCh_SSF alarm.
- A- TRUE
- **B-** FALSE

Answer:

A, A

Question 2

Question Type: MultipleChoice

When setting the LCAS mode, follow the following principles:

- 1. If devices at the two ends are both Huawei devices, set them to the "Standard Mode".
- 2. If a Huawei device is interconnected with a third-party device, set the interconnected devices to the same mode according to the mode supported by the third-party device.

Options:

A- TRUE

B- FALSE

Answer:

В

Question 3

Question Type: MultipleChoice

Which of the following technologies is the main difference between an open DWDM system and an integrated DWDM system?

| | | L: | _ | | _ | _ |
|---|---|----|---|---|---|---|
| | | - | | | C | - |
| 0 | P | ш | U | ш | J | |

- A- Wavelength conversion technology
- **B-** Optical amplification technology
- C- Multiplexing/Demultiplexing technology
- **D-** Optical supervisory technology

Answer:

Α

Question 4

Question Type: MultipleChoice

According to ITU-T recommendations, the requirement that the MSP switching time should be within 50 ms is conditional. For example, the number of NEs on an entire ring network is less than 16.

Options:

A- TRUE

| B- FALSE | .SE |
|-----------------|-----|
|-----------------|-----|

Answer:

В


Question 5

Question Type: MultipleChoice

After PDH services are configured on a per-NE basis, a complete trail cannot be searched out. Which of the following are possible causes? (Multiple Choice)

Options:

- A- Tributary board selection is incorrect.
- B- Line board selection is incorrect.
- **C-** Timeslot configuration is incorrect.
- **D-** Pass-through is not configured at intermediate sites.

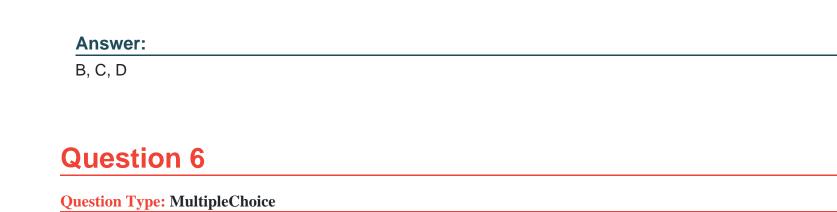

When the rate of an SNCP ring consisting of four OptiX OSN 2500 devices is 2.5 Gbit/s, the service capacity of this network can carry a maximum number of () 2 Mbit/s signals.

Options:

A- 504

B- 1008

C- 2016

D- 4032

Answer:

В

Question 7

Question Type: MultipleChoice

Which of the following is not a condition for triggering multiplex section protection (MSP)?

Options:

- A- The MS-AIS signal is detected.
- B- AU-AIS is detected.
- C- R-LOS is detected.
- **D-** R-LOF is detected.

Answer:

В

To Get Premium Files for H31-311 Visit

https://www.p2pexams.com/products/h31-311

For More Free Questions Visit

https://www.p2pexams.com/huawei/pdf/h31-311

