



**Free Questions for JN0-636 by ebraindumps**

**Shared by Christian on 08-12-2022**

**For More Free Questions and Preparation Resources**

**Check the Links on Last Page**

## Question 1

---

### Question Type: MultipleChoice

---

You are asked to download and install the IPS signature database to a device operating in chassis cluster mode. Which statement is correct in this scenario?

#### Options:

---

- A- You must download and install the IPS signature package on the primary node.
- B- The first synchronization of the backup node and the primary node must be performed manually.
- C- The first time you synchronize the IPS signature package from the primary node to the backup node, the primary node must be rebooted.
- D- The IPS signature package must be downloaded and installed on the primary and backup nodes.

#### Answer:

---

D

## Question 2

---

**Question Type: MultipleChoice**

---

You want to configure a threat prevention policy.

Which three profiles are configurable in this scenario? (Choose three.)

**Options:**

---

- A- device profile
- B- SSL proxy profile
- C- infected host profile
- D- C&C profile
- E- malware profile

**Answer:**

---

A, B, C

## Question 3

---

**Question Type: MultipleChoice**

---

While troubleshooting security policies, you added the count action. Where do you see the result of this action?

**Options:**

---

- A- In the show security policies hit-count command output.
- B- In the show security flow statistics command output.
- C- In the show security policies detail command output.
- D- In the show firewall log command output.

**Answer:**

---

D


## Question 4

---

**Question Type:** MultipleChoice

---

Exhibit

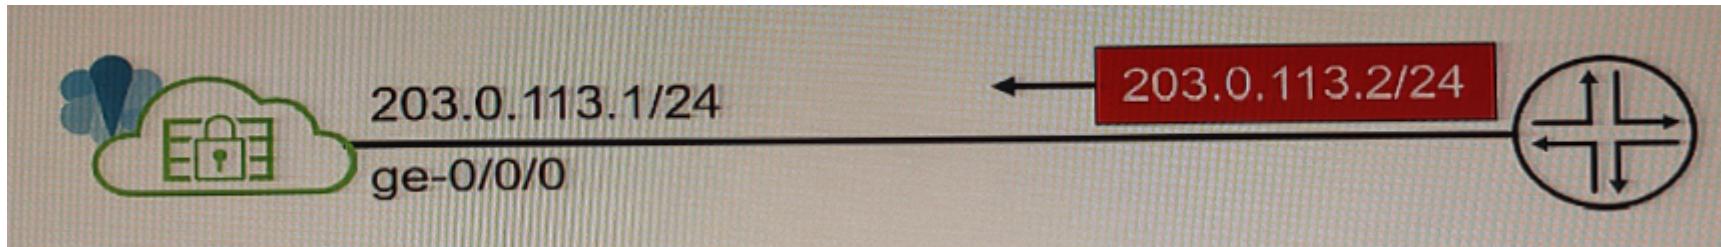

You configure Source NAT using a pool of addresses that are in the same subnet range as the external `ge-0/0/0` interface on your vSRX device. Traffic that is exiting the internal network can reach external destinations, but the return traffic is being dropped by the service provider router.

Referring to the exhibit, what must be enabled on the vSRX device to solve this problem?

### Options:

---

- A- STUN
- B- Proxy ARP
- C- Persistent NAT
- D- DNS Doctoring

### Answer:

---

D

## Question 5

---

Question Type: MultipleChoice

---

Exhibit

```
[edit security policies from-zone trust to-zone untrust policy Adaptive-Threat-Profiling]
user@SRX-1# show
match {
    source-address any;
    destination-address any;
    application any;
    dynamic-application [ junos:web:proxy junos:web:anonymizer junos:TOR ];
}
then {
    reject {
        application-services {
            security-intelligence {
                add-destination-ip-to-feed {
                    Proxy_Nodes;
                }
            }
        }
    }
}
...
```

Referring to the exhibit, which two statements are true? (Choose two.)

Options:

---

- A-** The SRX-1 device can use the Proxy\_\_Nodes feed in another security policy.
- B-** You can use the Proxy\_Nodes feed as the source-address and destination-address match criteria of another security policy on a different SRX Series device.
- C-** The SRX-1 device creates the Proxy\_wodes feed, so it cannot use it in another security policy.
- D-** You can only use the Proxy\_Node3 feed as the destination-address match criteria of another security policy on a different SRX Series device.

**Answer:**

---

A, C

## Question 6

---

**Question Type:** MultipleChoice

---

You are asked to download and install the IPS signature database to a device operating in chassis cluster mode. Which statement is correct in this scenario?

**Options:**

---

- A- You must download and install the IPS signature package on the primary node.
- B- The first synchronization of the backup node and the primary node must be performed manually.
- C- The first time you synchronize the IPS signature package from the primary node to the backup node, the primary node must be rebooted.
- D- The IPS signature package must be downloaded and installed on the primary and backup nodes.

**Answer:**

---

D

## Question 7

---

**Question Type:** MultipleChoice

---

While troubleshooting security policies, you added the count action. Where do you see the result of this action?

**Options:**

---

- A- In the show security policies hit-count command output.
- B- In the show security flow statistics command output.



**C-** In the show security policies detail command output.

**D-** In the show firewall log command output.

**Answer:**

---

D

## Question 8

---

**Question Type: MultipleChoice**

---

You want to configure a threat prevention policy.

Which three profiles are configurable in this scenario? (Choose three.)

**Options:**

---

**A-** device profile

**B-** SSL proxy profile

**C-** infected host profile

D- C&C profile

E- malware profile

**Answer:**

---

A, B, C

**To Get Premium Files for JN0-636 Visit**

**<https://www.p2pexams.com/products/jn0-636>**

**For More Free Questions Visit**

**<https://www.p2pexams.com/juniper/pdf/jn0-636>**

