

# Free Questions for NS0-520 by braindumpscollection

Shared by Dixon on 29-01-2024

For More Free Questions and Preparation Resources

**Check the Links on Last Page** 

# **Question 1**

### **Question Type:** MultipleChoice

You are about to replace a failed Brocade Fibre Channel switch. Which three steps do you take prior to connecting the switch in the SAN? (Choose three.)

### **Options:**

- A- Force the new switch to be the principle switch.
- B- Change the domain ID of the replacement switch to the domain ID of the failed switch.
- **C-** Clear all zoning configurations on the replacement switch.
- D- Change the core PID format of the replacement switch to the core PID format of the failed switch.
- **E-** Preload the zoning information from the fabric onto the new switch.

#### **Answer:**

B, C, D

# **Question 2**

#### **Question Type:** MultipleChoice

When running diagnostic tests after an initial installation of a NetApp FAS3000 storage system, which command is used to run a comprehensive set of diagnostic tests on the entire system?

### **Options:**

A- all

**B-** comprehensive

C- full

D- stress

#### **Answer:**

Α

# **Question 3**

### **Question Type:** MultipleChoice

Which configuration for primary block (FC and iSCSI) data does NetApp best practices recommend? (Choose two.)

Options:  A- single controller single shelf  B- single controller multiple shelves  C- dual controller single shelf  D- dual controller multiple shelves  Answer:	
C- dual controller single shelf D- dual controller multiple shelves	
D- dual controller multiple shelves	
Answer:	
Answer:	
C, D	
Question 4	
Question Type: MultipleChoice	
Question Type: MultipleChoice	
Question Type: MultipleChoice  Which native GUI switch tool is used to manage Cisco MDS-Series switches and directors?	

A- Operations Manager
B- Fabric Manager
C- Web Tools
D- Data Fabric Manager
Answer:
В
Question 5
Question Type: MultipleChoice
After completing the configuration of a new Brocade Fibre Channel switch, which command do you use to verify your configuration?
Options:
A- switchshow
B- show config
C- configshow

D- cfgshow

#### **Answer:**

С

# **Question 6**


#### **Question Type:** MultipleChoice

When booting your NetApp storage system for the first time the system fails to boot.

What should you do first to address this problem?

### **Options:**

- A- You turn off your storage system and disk shelves, and then turn on the disk shelves. You then check the quick reference card that came with the disk shelf for information about LED responses.
- B- You re-download the boot image to the compact flash card, then reboot the system.
- C- You look for a description of the problem on the LCD and console. You then follow the instructions, if provided, on the LCD and console.
- D- You verify disk shelf compatibility and check the disk shelf IDs to verify that the disk shelf 1 (for DS14 series) must be connected to

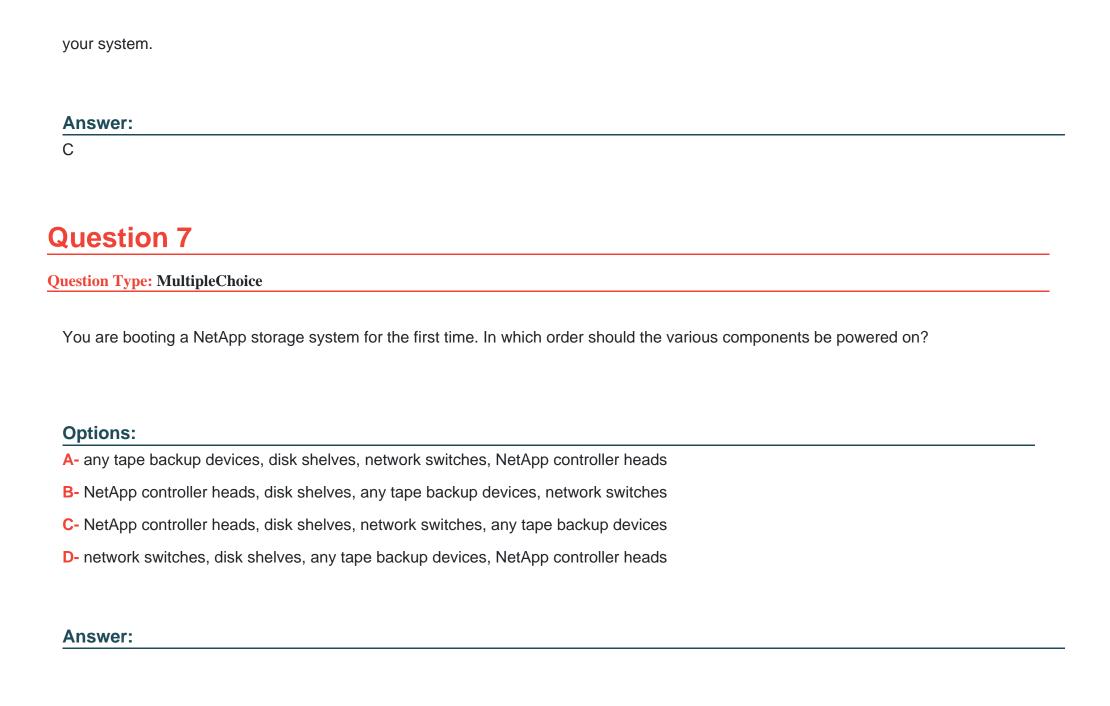

# **Question 8**

### **Question Type:** MultipleChoice

When setting up a VLAN for administrative security purposes, which four ports are the only important ports to include in the VLAN? (Choose four.)

### **Options:**

- A- Storage Controllers Management Ethernet ports
- **B-** FC Switches Ethernet port
- C- Hosts iSCSI HBA Ethernet port
- **D-** Ethernet Switches Management port
- E- Storage Controller iSCSI Ethernet Target ports
- F- Hosts NIC Ethernet port

#### **Answer:**

A, B, D, F

# **Question 9**

## **Question Type:** MultipleChoice

What is the default Ethernet packet size (or MTU - Maximum Transmission Unit) for Ethernet ports on Ethernet switches?

### **Options:**

- **A-** 2112 bytes
- **B-** 9000 bytes
- **C-** 1500 bytes
- **D-** 12000 bytes

#### **Answer:**

С

# **To Get Premium Files for NS0-520 Visit**

https://www.p2pexams.com/products/ns0-520

# **For More Free Questions Visit**

https://www.p2pexams.com/netapp/pdf/ns0-520

