



Nokia 4A0-104 Practice Questions

Shared by Wise on 14-10-2026

For More Free Questions and Preparation Resources

Check the Links on Last Page



Question 1

Question Type: MultipleChoice

Which of the following statements are TRUE about configuring a SDP between an IES and a VPLS? (Choose 2)

Options:

- A- The SDP must be a mesh
- B- The SDP must be a spoke.
- C- Once the SDP is configured on both PE routers, both the services will be operationally up without further configuration changes.
- D- The Layer 2 MTUs must match between the IES and the VPLS
- E- The Layer 2 MTU must be 14 bytes smaller on the VPLS than it is on the IES.

Answer:

B, D

Question 2

Question Type: MultipleChoice

Which of the following SAPs will forward all tagged and untagged frames on the port? (Choose 2)

Options:

- A- sap 1/1/1
- B- sap 1/1/1:*
- C- sap 1/1/1:*.0
- D- sap 1/1/1:0*
- E- sap 1/1/1:0

Answer:

A, B

Question 3

Question Type: MultipleChoice

Which option best about the BGP VPN-IPv4 address family is FALSE?

Options:

- A- When a PE router receives an IPv4 prefix from its local CE, it creates a VPN-IFV4 prefix.
- B- VPN-IPv4 allows BGP to distinguish between duplicate prefixes originating from different customers.
- C- In a VPRN, data traffic is carried in packets that have VPN-IPv4 addresses.
- D- VPN-IFV4 addresses are only present within the service provider network.

Answer:

C

Question 4

Question Type: MultipleChoice

Which option best is a characteristic of a VPLS?

Options:

- A- All SAPs of a VPLS belong to the same broadcast domain.
- B- When a new site is added, all the existing sites need to be shutdown and re-provisioned.
- C- An additional T-LDP session is required between PEs for each additional VPLS that is provisioned.
- D- Multiple VPLSes on the same router share a single MAC FDB.

Answer:

A

Question 5

Question Type: MultipleChoice

Click the exhibit.

```
A: R1# oam [?] "clockwise"  
[redacted] 0 hops min, 0 hops max, 116 byte packets  
1 10.10.10.2 rtt=0.470ms rc=8(DSRtrMatchLabel)  
2 10.10.10.4 rtt=0.784ms rc=8(DSRtrMatchLabel)  
3 10.10.10.3 rtt=0.887ms rc=3(EgressRtr)  
A: R1#
```

Which OAM tool produced this output?

Options:

- A- vprn-ping
- B- sdp-ping
- C- traceroute
- D- lsp-trace

Answer:

D

Question 6

Question Type: MultipleChoice

In a Layer 2 encapsulation using T-LDP, what does the first (top) label represent?

Options:

- A- Tunnel Label
- B- VC Label
- C- Operational Control Word
- D- UNI
- E- NNI

Answer:

A

Question 7

Question Type: MultipleChoice

Which of the following best describes an IES?

Options:

- A- Layer 3 direct Internet access service.
- B- Layer 2 point-to-point service.
- C- Layer 2 multipoint-to-multipoint service.
- D- Layer 3 IP multipoint-to-multipoint VPN service.

Answer:

A

Question 8

Question Type: MultipleChoice

Which of the following SAPs will forward all tagged and untagged frames on the port?

Options:

- A- sap 1/1/1
- B- sap 1/1/1:*0
- C- sap 1/1/1:0.*
- D- 1/1/1:0


Answer:

A

Question 9

Question Type: MultipleChoice

Click the exhibit.

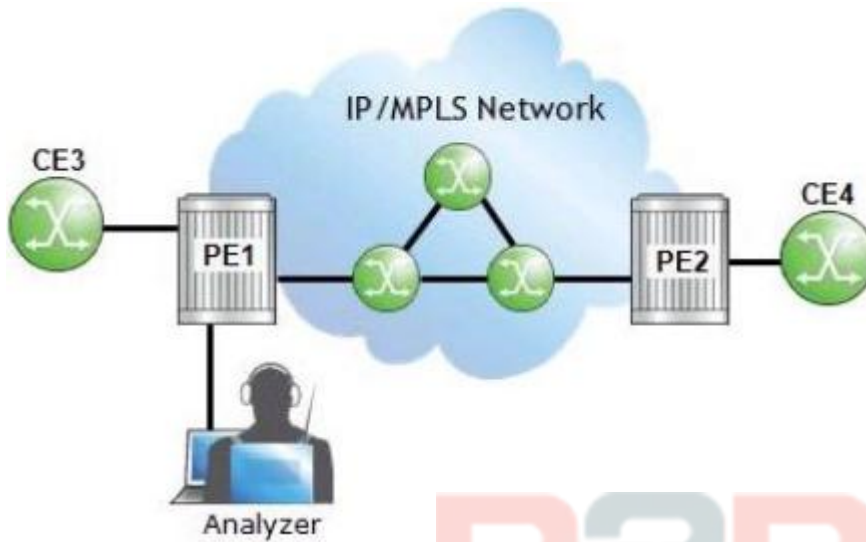

The operator at PE1 wants to analyze the traffic between CE4 and PE2. On an Nokia 7750 SR, which of the following is required as part of the configuration?

Options:

- A- Both PE1 and PE2 need a mirror source.
- B- PE2 needs a mirror source with the remote source specified.
- C- PE1 needs a mirror source with the remote source specified.
- D- Both PE1 and PE2 need a mirror destination.
- E- PE2 needs a mirror destination that specifies a SAP.

Answer:

D

To Get Premium Files for 4A0-104 Visit

<https://www.p2pexams.com/products/4a0-104>

For More Free Questions Visit

<https://www.p2pexams.com/nokia/pdf/4a0-104>

20%
DISCOUNT

P2P
exams