



Free Questions for 010-151 by vceexamstest

Shared by Bradford on 20-10-2022


For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Question Type: MultipleChoice

Refer to the exhibit.

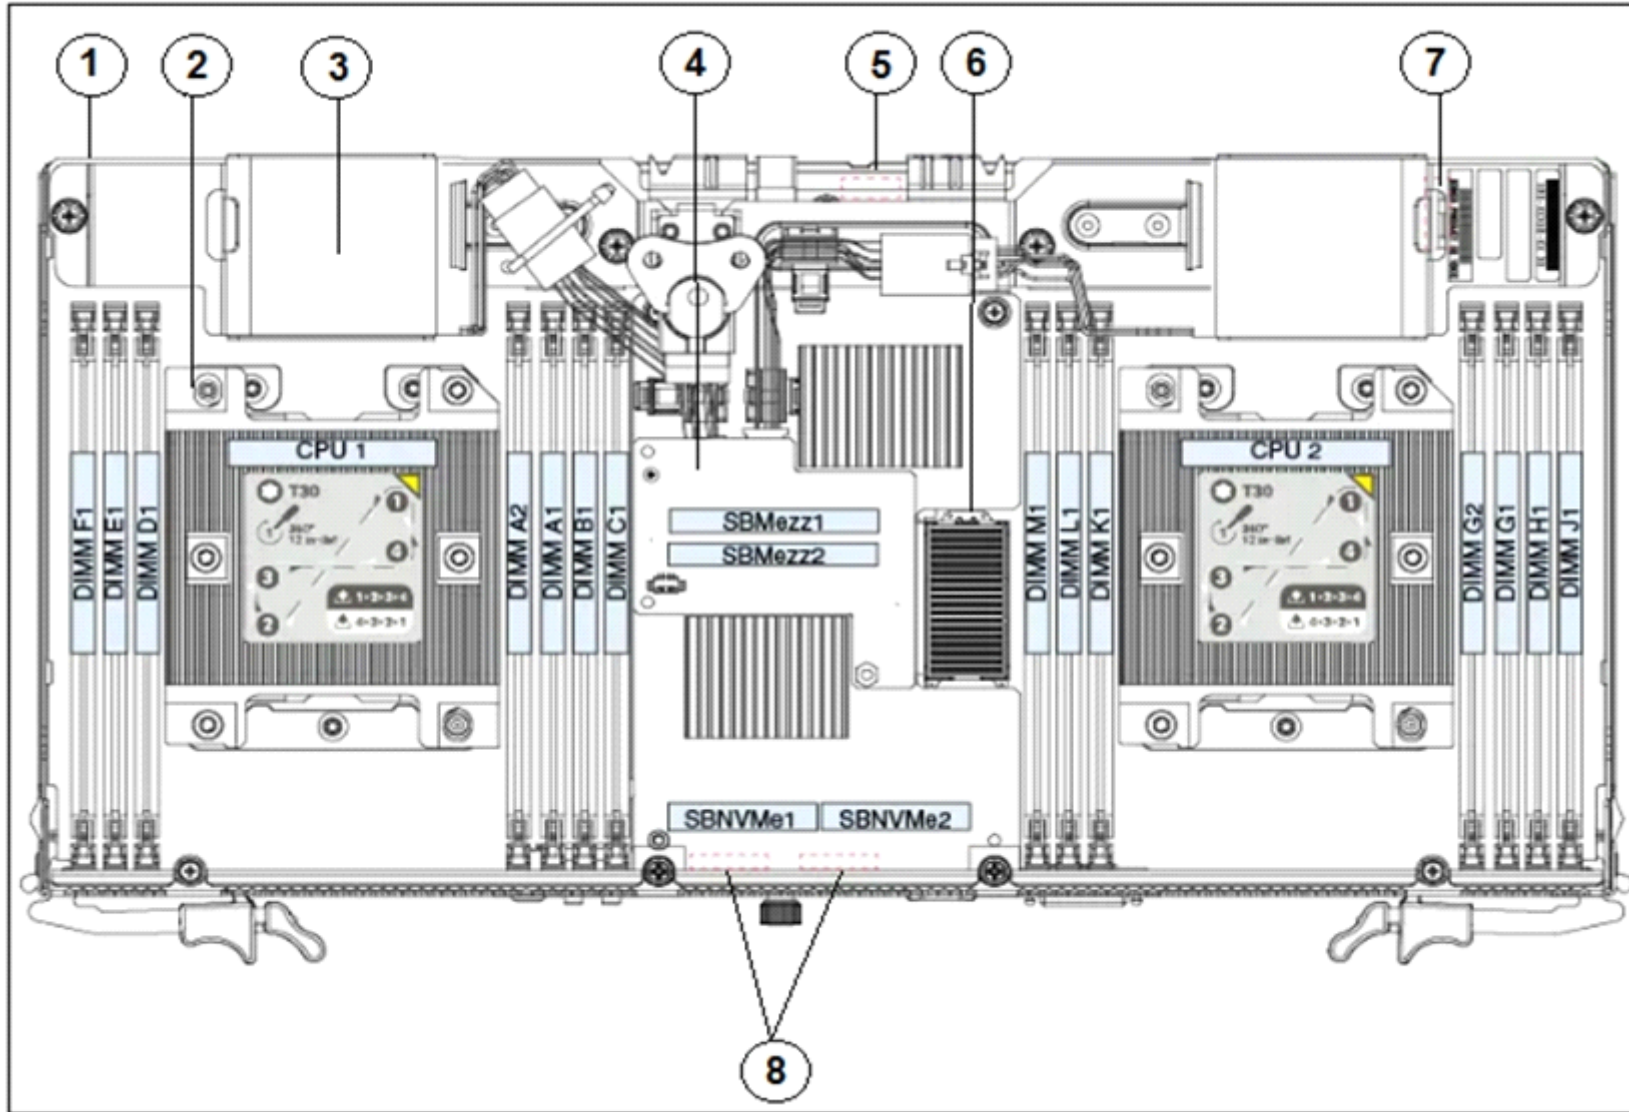

What item does 6 represent?

Options:

- A- Trusted platform module (TPM) socket
- B- RAID supercap connector
- C- RTC battery CR2032 socket
- D- Mezzanine-style connector for optional I/O expander module

Answer:

D

Explanation:

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/s/hw/S3260M5/install/S3260M5/S3260M5_chapter_00.html

Question 2

Question Type: MultipleChoice

Which statement is true about QSFP?

Options:

- A-** The four 10 Gbit/sec channels that QSFP+ supports can be combined into a single 40 Gigabit Ethernet link.
- B-** QSFP-DD stands for Quad Small Form Factor Pluggable Double Distance.
- C-** The QSFP+ offers higher data speed than QSFP28.
- D-** 100GBASE-SR4 supports a much longer distance than 100GBASE-LR4.

Answer:

A

Question 3

Question Type: MultipleChoice

How many wires does each PCIe lane have?

Options:

- A- Two
- B- Four
- C- Eight
- D- Sixteen

Answer:

B

Explanation:

<https://cotscomputers.com/blog/pcie-lanes/#:~:text=Each%20lane%20consists%20of%20two,x4%2C%20x8%2C%20or%20x16>

Question 4

Question Type: MultipleChoice

With which data center type can a company lease the equipment and infrastructure?

Options:

- A- Managed services data center
- B- Colocation data center
- C- Green technology data center
- D- Enterprise data center

Answer:

A

Question 5

Question Type: MultipleChoice

Which Cisco MDS 9700 Series platform supports the Supervisor-1E module?

Options:

- A- Cisco MDS 9706

B- Cisco MDS 9709

C- Cisco MDS 9710

D- Cisco MDS 9718

Answer:

D

Explanation:

<https://www.cisco.com/c/en/us/products/collateral/storage-networking/mds-9700-series-multilayer-directors/datasheet-c78-736317.html>

Question 6

Question Type: MultipleChoice

Storage virtualization is commonly used for SANs in data centers to scale out the storage resources. The common methods of storage virtualization include array-based storage virtualization. What are the other two methods? (Choose two.)

Options:

- A- Host-based storage virtualization
- B- Hypervisor-based storage virtualization
- C- Embedded-based storage virtualization
- D- Switch-based storage virtualization
- E- Network-based storage virtualization

Answer:

A, E

Explanation:

<https://www.cioreview.com/news/implementing-storage-virtualization-for-efficient-data-management-nid-18073-cid-86.html>

Question 7

Question Type: MultipleChoice

During the auto-sync firmware upgrade process, what should be your initial input entered once the Fabric Interconnect boots up?

Options:

A- console

B- gui

C- upgrade firmware

D- auto-sync

Answer:

A

Question 8

Question Type: MultipleChoice

Which SAN protocol uses Ethernet network without IP encapsulation?

Options:

A- IFCP

B- FCP

C- iSCSI

D- FCoE

E- FC


Answer:

D

Question 9

Question Type: MultipleChoice

Refer to the exhibit.

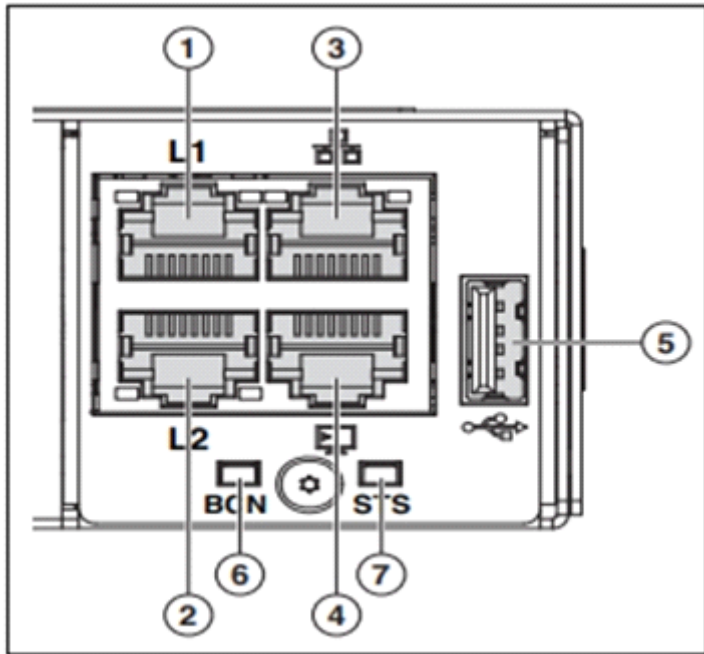

What does it mean when item 7 (System Status LED) has a blinking red status?

Options:

- A- Major fault with the system board
- B- Power shut down by software
- C- Secure boot validation has failed
- D- Power on Self-Test (POST) failed

E- Major fault with memory DIMM

Answer:

D

Explanation:

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/hw/6300-install-guide/6300_Series_HIG/6300_Series_HIG_chapter_01.html

Question 10

Question Type: MultipleChoice

Refer to the exhibit.

Cisco Integrated Management Controller

Chassis / Summary

Refresh | Host Power | Launch KVM | Ping

Cisco Integrated Management Controller (Cisco IMC) Information

Product Name: UCS C240 M45	HostName: C240-FCM1923V3DK
Serial Number: FCH1923V3dX	IP Address: 10.0.2.21
PID: UCSC-C240-M4S	MAC Address: E5:65:49:74:CO:82
UUID: 277705120-8843-4844-8296-0FF9CO1B850C	Firmware Version: 4.0(2c)
BIOS Version: C240M4.2.0.2a.0 102318C340	Current Time (UTC): Tue Apr 30.06:29:00 2019
Description: <input type="text"/>	Local Time: Tue Apr 30.06:29:00 2019 UTC +0000
Asset Tag: <input type="text" value="Unknown"/>	Timezone: UTC

[Select Timezone](#)

Chassis Status

- Power State:** ● Off
- Overall Server Status:** ✓ Good
- Temperature:** ✓ Good
- Overall DIMM Status:** ✓ Good
- Power Supplies:** ✓ Good
- Fans:** ✓ Good
- Locator LED:** ● Off
- Overall Storage Status:** ✓ Good

Server Utilization

Metric	Utilization (%)
Overall Utilization	~35
CPU Utilization	~35
Memory Unknown	0
IO-Utilization	0

Which item does D represent?

Options:

- A-** Pin icon (prevents Navigation pane from sliding)
- B-** Favorite icon (make any specific work pane in the application as your favorite)
- C-** To view the Navigation pane
- D-** Index Icon (view listing in alphabetical order)

Answer:

A

Explanation:

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/c/sw/gui/config/guide/4_1/b_Cisco_UCS_C-series_GUI_Configuration_Guide_41/b_Cisco_UCS_C-series_GUI_Configuration_Guide_41_chapter_01.html

To Get Premium Files for 010-151 Visit

<https://www.p2pexams.com/products/010-151>

For More Free Questions Visit

<https://www.p2pexams.com/cisco/pdf/010-151>

