



Free Questions for H12-831_V1.0 by vceexamstest

Shared by Pate on 20-10-2022

For More Free Questions and Preparation Resources


Check the Links on Last Page

Question 1

Question Type: MultipleChoice

As shown in the figure, configure a backhaul summary route 10.0.0.0/24 on the border route RT1. next hop to RT2. At the same time, the default route to the external network is configured. At this point, a routing black hole will appear. The following is about routing

Is the black hole statement correct? (multiple choice)

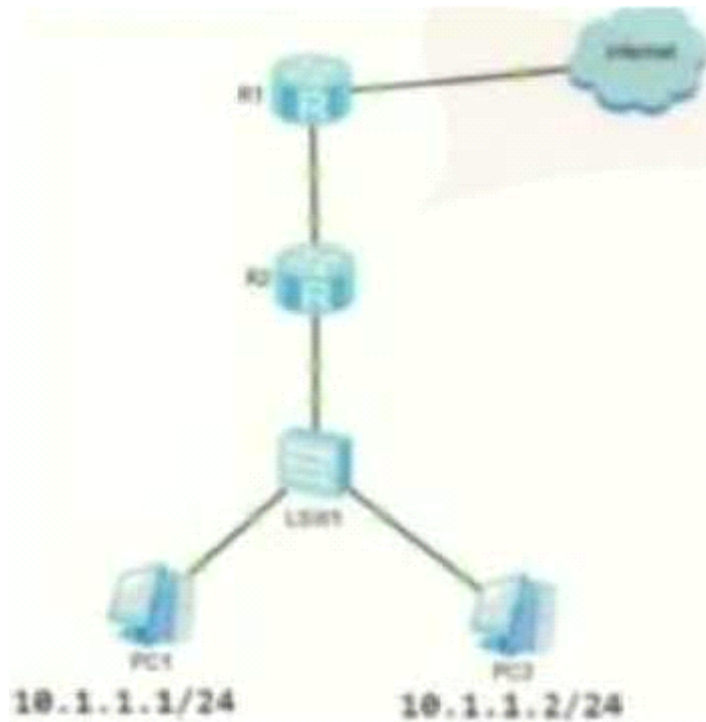

Options:

- A- Configuring black hole routing can solve the routing black hole problem
- B- Routing black hole has no impact on the network and can be ignored
- C- Precise routing \$ can always avoid routing black holes
- D- If the terminal in the network sends data packets to the network segment that does not appear on the internal network, a loop will occur

Answer:

A, C, D

Question 2

Question Type: MultipleChoice

Ethernet is a network that supports broadcasting, and once there is a loop in the network, this simple broadcasting mechanism can cause catastrophic consequences. Which of the following phenomena may be caused by loops

Options:

- A- The device cannot log in remotely
- B- pass throughPINGSerious packet loss during network test with command
- C- CPUOccupancy exceeds70%
- D- use on the deviceDISPLAY INTERFA, CEcommand to view interface statistics, it is found that the interface receives a large number of broadcast message

Answer:

A, B, C, D

Question 3

Question Type: MultipleChoice

What characteristics must a high-risk operation plan have?

Options:

- A- with verification

B- Strong operability

C- accurate

D- can return

Answer:

A, B, C, D

Question 4

Question Type: MultipleChoice

Which of the following reasons may cause the hosts in the same--VLAN LAN to fail to communicate with each other

Options:

A- port isolation is configured on the switch

B- the wrong port is configured on the machine, andMA, Caddress binding

C- interface is artificialshutdownor the physical interface is damaged

D- switchMA, Caddress learning errors

Answer:

A, B, C, D

Question 5

Question Type: MultipleChoice

A campus deploys OSPF to implement network interworking. The LSDB of R2 is shown in the figure. From this LSDB, it is possible to
What information was obtained?

Area 0 Area 1

(R2)display ospf lsdb

```
OSPF Process 1 with Router ID 10.1.123.2
Link State Database
Area: 0.0.0.0
```

Type	Link State ID	Age	LS Type	Sequence	Metric
Router	10.1.121.3	792	36	80000009	1
Router	10.1.123.2	541	36	80000000	1
Router	10.1.121.1	797	16	80000006	1
Network	10.1.121.1	797	36	80000000	1
Sum Net	10.1.150.0	788	26	30000008	1
Sum Net	10.1.124.0	46	26	30000006	1


```
0.0.0.1
Type: LSA
Link State ID: 10.1.124.0
Age: 46
LS Type: 26
Sequence: 30000006
Metric: 1
```



```
AS External
Type: External
Link State ID: 10.1.121.1
Age: 797
LS Type: 36
Sequence: 80000000
Metric: 1
```

Options:

- A- Area 1 in Type 3 LSA. maybe R2 in the area 1 In the correct direction type 3 LSA filtered
- B- Area 1 for NSSA area
- C- R2 will Type 7 LSA The default route is converted to Type 5 LSA default route for
- D- R2 exist OSPF The default route is delivered in the process

Answer:

B, D

Question 6

Question Type: Multiple Choice

Which of the following are static information coke analysis?

Options:

- A- Interface Type

- B- Packet loss rate
- C- License
- D- Equipment type

Answer:

A, C, D

Question 7

Question Type: MultipleChoice

According to this diagram, can we break the

Database information for					
Unk State Database					
tSPID	SeqNum	Checksu	Hotdtimc	LFngrh	ATT/P/OL
_a0c2-baf2 00-00	goooooog	0x4c4^l	1115G	B3	1/Q/O
ee8c a0c2 buaf2 02-	OKOOOC	0x2*3	ais	5*	o/o/o
Le«8c-a0c2.bafaXM>-00	0x0000	0x462f	1187	83	,/OA>

a0c2-baf2 00-00	q0000000g	0x4c4^l	1115G	B3	1/Q/O
ee8c a0c2 buaf2 02-	OKOOOC	0x2*3	ais	5*	o/o/o
Le«8c-a0c2.bafaXM>-00	0x00000	0x462f	1187	83	,/OA>
Ko&c 3*0^-00,	0x000000	0x2e^7	10B2	54	
	0x000000	0x843fS	10S3	103	
	04				

Options:

- A-** system-IDforee8c.a0c2.baf2The device' whose type isLevel-1
- B-** system-IDforee8c.a0c2.baf2device whose type isLevel-1-2
- C-** R4belong only toLevel-1
- D-** R4dry onlyLevel2

Answer:

B, C

Question 8

Question Type: MultipleChoice

According to this picture, cooked I'] can be judged?

```
vR1'display isis interface
```

Interface information for ISIS(1)

Interface Id	IPV4.State	IPV6.State	MTU	Type	DIS
GE0/0/0	001 Up	Up	1497	L1/L2	No/No
GE0/0/1	002 Up	Up	1497	L1/L2	No/No
1Loop0	001 Up	Up	1500	L1/L2	one

Options:

- A- R1ofGE0/0/1Interface is not enabledIS-IS IPv6
- B- R1ofGE0/0/1interfacelS-ISThe interface type isLeve-1
- C- R1ofGEO/O/OinterfacelS-ISThe interface type isLevel-1-2
- D- R1ofGEO/O/Ointerface is enabledIS-IS IPv6

Answer:

C, D

Question 9

Question Type: MultipleChoice

Which of the following actions may affect the normal operation of the customer's network?

Options:

- A- Device naming
- B- software upgrade
- C- Hardware expansion
- D- Routing Protocol Configuration Changes

Answer:

B, C, D

Question 10

Question Type: MultipleChoice

Which of the following information can the DHCP binding table contain?

Options:

- A- port andUDPport
- B- MA, Caddress
- C- IPaddress
- D- lease time

Answer:

B, C, D

Question 11

Question Type: MultipleChoice

The Discovery message of LDP is used for neighbor discovery, and LDP has different discovery mechanisms when discovering neighbors. The following statement about the Discovery message in the basic discovery mechanism is correct

Options:

- A- TCP After the connection is established. LSR do not continue sending Hello Message
- B- Purpose of the message IP address is multicast IP address 224.0.0.2
- C- This message is encapsulated in UDP. In the message, the destination port number is 646
- D- The message is sent to the specified LDP Peer

Answer:

B, C

To Get Premium Files for H12-831_V1.0 Visit

https://www.p2pexams.com/products/h12-831_v1.0

For More Free Questions Visit

<https://www.p2pexams.com/huawei/pdf/h12-831-v1.0>

