



Free Questions for MCD-Assoc by [braindumpscollection](#)

Shared by [Black](#) on 06-06-2022

For More Free Questions and Preparation Resources

[Check the Links on Last Page](#)

Question 1

Question Type: MultipleChoice

What is the output type of the DataWeave map operator?

Options:

- A- Map
- B- Array
- C- String
- D- Object

Answer:

B

Explanation:

<https://help.mulesoft.com/s/QUESTION NO:/0D52T00004mXVAVSA4/what-is-difference-between-mapand-mapobject-in-dataweave>

Question 2

Question Type: MultipleChoice

Refer to the exhibit. A Payload Filter component processes a message with a non-empty payload. What happens when the payload does not match the Payload Filter type?

```
<payload-type-filter expectedType= "java.lang.String" doc:name= "Payload is not null"/>
```

Options:

- A- It throws a Filter exception
- B- It throws a configurable exception
- C- It calls a compensation flow
- D- It silently stops processing the message

Answer:

A

Question 3

Question Type: MultipleChoice

Refer to the exhibit. What is the correct way to create a user?

```
##RAML 1.0

title: Acme Insurance API
version: 1.0
baseUri: http://localhost:8081/api

/users:
  post:
    headers:
      username: string
      password: string
    body:
      application/json
```

A. No environment ▾

POST ▾ Params ▾

Authorization Headers (3) Body Pre-request Script Tests Cookies Code

Key	Value	Description	...	Bulk Edit	Presets ▾
<input checked="" type="checkbox"/> Content-Type	application/json				
<input checked="" type="checkbox"/> username	max				
<input checked="" type="checkbox"/> password	mule				

B. No environment ▾

POST ▾ Params ▾

Authorization Headers (1) Body Pre-request Script Tests Cookies Code

Key	Value	Description	...	Bulk Edit	Presets ▾
<input checked="" type="checkbox"/> Content-Type	application/json				


C.  No environment ▾

POST ▾ Params Send ▾ Save ▾

Authorization Headers (1) Body • Pre-request Script Tests Cookies Code

form-data x-www-form-urlencoded raw binary **JSON(application/json)** ▾

```
1 {
2   "username" : "max",
3   "password": "mule"
4 }
```

D.  No environment ▾

POST ▾ http://localhost:8081/api/users/max/mule Params Send ▾ Save ▾

Authorization Headers (1) Body Pre-request Script Tests Cookies Code

Key	Value	Description	...	Bulk Edit	Presets ▾
<input checked="" type="checkbox"/> Content-Type	application/json				

Options:

- A- Option A
- B- Option B
- C- Option C
- D- Option D

Answer:

A

Question 4

Question Type: MultipleChoice

What path setting is required for an HTTP Listener endpoint to route all requests to an APIkit router?

Options:

- A- /*
- B- /
- C- /{*}
- D- ALL

Answer:

B


Explanation:

<https://docs.mulesoft.com/mule-runtime/3.7/http-listener-connector>

Question 5

Question Type: MultipleChoice

Refer to the exhibit. In the execution of the Scatter-Gather, the flow1 route completes after 10 seconds and the flow2 route completes after 20 seconds. How many seconds does it take for the Scatter-Gather to complete?

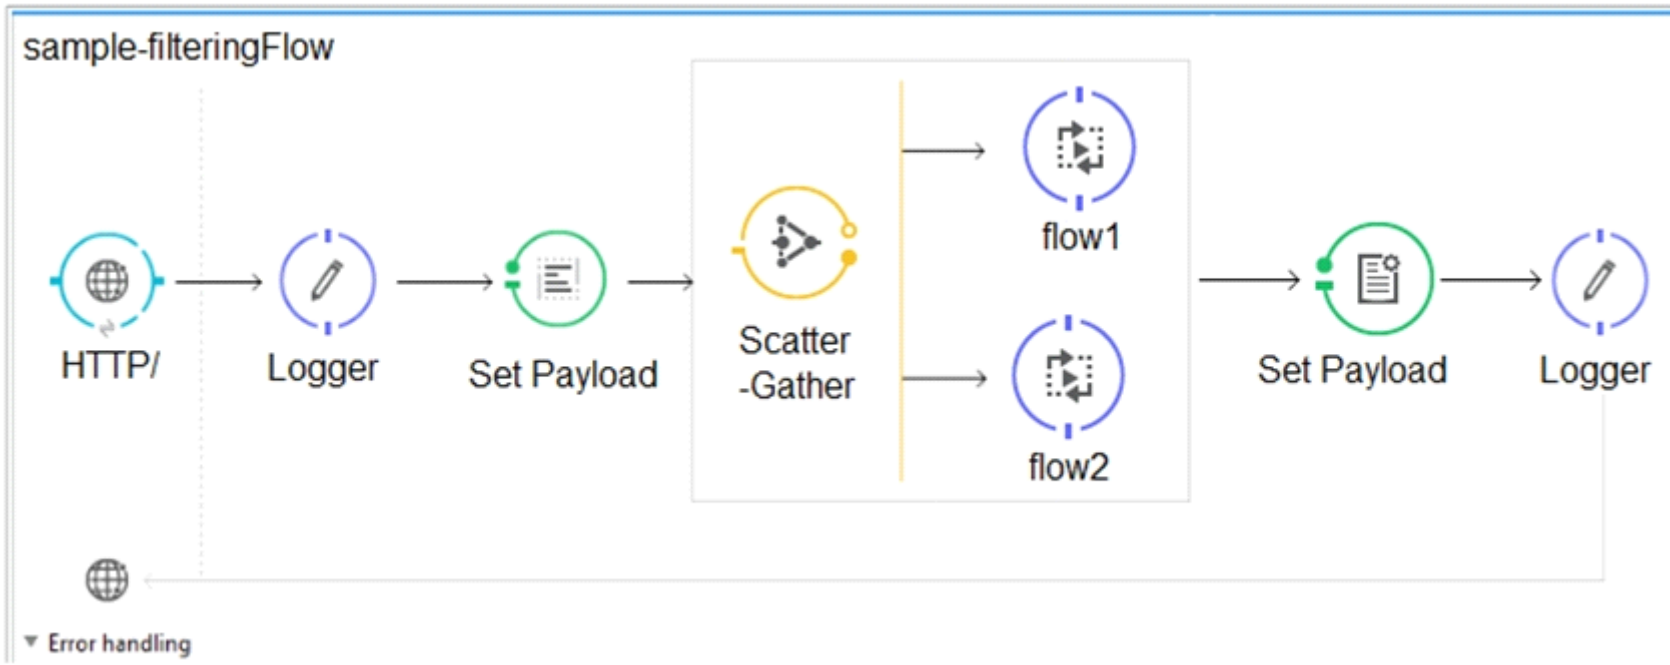

Options:

- A- 0
- B- 10
- C- 20
- D- 30

Answer:

A


Explanation:

<https://dzone.com/articles/scatter-gather-mule-esb>

Question 6

Question Type: MultipleChoice

Refer to the exhibits. What is the expected behavior of this application?

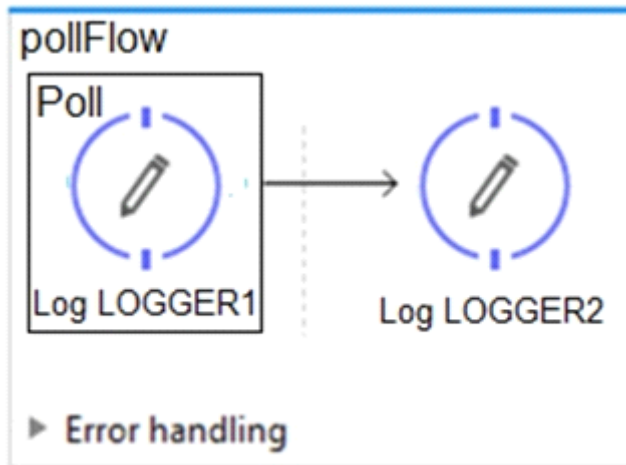

```
<flow name= "pollFlow">
  <poll doc:name= "Poll">
    <fixed-frequency-scheduler frequency= "2000"/>
    <logger message= "#['LOGGER1']" level= "INFO" doc:name= "Log LOGGER1" />
  </poll>
  <logger message= "#['LOGGER2']" level= "INFO" doc:name= "Log LOGGER2" />
</flow>
```

Options:

- A- The application will continuously output LOGGER1 and LOGGER2 messages every 2 seconds
- B- After 2 seconds, the application will output LOGGER1 and LOGGER2 messages exactly once

- C- The application will immediately output LOGGER1 and LOGGER2 messages exactly once
- D- An exception will be thrown indicating there is no inbound endpoint as a message source

Answer:

A

Question 7

Question Type: MultipleChoice

Refer to the exhibits. What is the expected data that the POST /accounts endpoint expects?

```
##RAML 1.0
title: Accounts API
version: 1.0

types:
  Account: !include datatypes/Account.raml
  AccountNoID: !include datatypes/AccountNoID.raml

/accounts:
  get:
    description: Get all accounts
    responses:
      200:
        body:
          application/json:
            type: Account[]
            example: !include examples/AccountsExample.raml
  post:
    description: Create an account
    body:
      application/json:
        type: AccountNoID
```

Account.raml

```
##RAML 1.0 DataType

type: object
properties:
  id: string
  name: string
  address: string
  customer_since: date-only
  balance: number
```

AccountNoID.raml

```
##RAML 1.0 DataType

type: object
properties:
  name: string
  address: string
  customer_since: date-only
  balance: number
  bank_agent_id: string
```

A.

```
{  
  "id": "4892",  
  "name": "Geordi La Forge",  
  "address": "1 Forge Way, Midgard, CA 95928",  
  "customer_since": "2014-01-04",  
  "balance": 4829.29  
}
```

B.

```
<item>  
  <name>Geordi La Forge</name>  
  <address>1 Forge Way, Midgard, CA 95928</address>  
  <customer_since> 2014-01-04</customer_since>  
  <balance> 4829.29</balance>  
  <bank_agent_id>48-SJT-282924-KL</bank_agent_id>  
</item>
```

C.

```
<item>  
  <id>48292</id>  
  <name>Geordi La Forge</name>  
  <address>1 Forge Way, Midgard, CA 95928</address>  
  <customer_since>2014-01-04</customer_since>  
  <balance>4829.29</balance>  
</item>
```

D.

```
{
  "name": "Geordi La Forge",
  "address" : "1 Forge Way, Midgard, CA 95928",
  "customer_since": "2014-01-04",
  "balance": 4829.29
  "bank_agent_id": "48-SJT-282924-KL"
}
```

Options:

- A- Option A
- B- Option B
- C- Option C
- D- Option D

Answer:

A

To Get Premium Files for MCD-Assoc Visit

<https://www.p2pexams.com/products/mcd-assoc>

For More Free Questions Visit

<https://www.p2pexams.com/mulesoft/pdf/mcd-assoc>

