

Free Questions for APSCA by certscare

Shared by Farley on 15-04-2024

For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Question Type: MultipleChoice

Alfresco Process Services uses the 3rd party library Aspose to transform documents. Which statements are correct regarding Aspose? (Choose two.)

Options:

- A- When activiti-app is installed with installer, no manual action is needed to deploy an Aspose license to fully function.
- B- When activiti-app is installed using the war distributions, an Aspose license named "transform.lic" has to be deployed manually.
- C- Regardless of how activiti-app is installed, Aspose does not require a license to be deployed in order to fully function.
- D- When activiti-app is installed using the war distributions, no manual action is needed to deploy an Aspose license to fully function.
- E- Regardless of how activiti-app is installed, the path to the required Aspose license can be configured in the activiti-admin.properties file.

Answer:

B, E

Question 2

Question Type: MultipleChoice

By default, into which of the following filesystem locations can the Alfresco Process Services' license file be uploaded? (Choose two.)

Options:

- A- In the application container classpath.
- B- In the license subfolder of the installation directory.
- C- In the location defined by the \$USER_HOME environment variable.
- D- In the location defined by the \$USER_HOME environment variable.
- E- In the filesystem location defined by \$USER_HOME/.activiti/enterprise-license/

Answer:

A, E

Question 3

Question Type: MultipleChoice

You notice that once you have installed activiti-app and started using it that you have the following directories:

act data/activiti-elastic-search-data and act data/data.

If you need to move the data used by activiti-app of to another disk because you are low on disk space, which statement is correct?

Options:

- A- The act_data/activiti-elastic-search-data directory must be copied over to the new location and update the path in the activiti-app.properties.
- B- The act_data/data directory does not need to be copied over since, it will repopulate from the database as long as the path in the activiti-app.properties is updated.
- C- The act_data/data directory has sub directories which you can copy to multiple different disks and update the paths in the activitiapp.properties.
- D- The act_data/data and act_data/activiti-elastic-search-data both must be copied over to the new location and update the path in the activiti-app.properties.
- E- The act_data/data directory must be copied to the new location and update the path in the activiti-app.properties.

Answer:

В

Question 4


Question Type: MultipleChoice
Which of the following application containers are supported by Alfresco Process Services? (Choose two.)
Options:
A- Tomcat.
B- JBoss.
C- Jetty.
D- Glassfish.
E- Geronimo.
Answer:
A, B


Question 5

Question Type: MultipleChoice

What are the media available to install Alfresco Process Services? (Choose two.)

Options:	
A- Java Libraries.	
B- Zip files.	
C- Alfresco Module Pa	ickage.
D- War files.	
E- Installation wizard.	
Answer:	
D, E	
Question 6	
Question Type: Multiple	Choice
How do the activiti-app	o UI and activiti-admin UI communicate with the Activiti Process Engine?
Options:	
Options:	

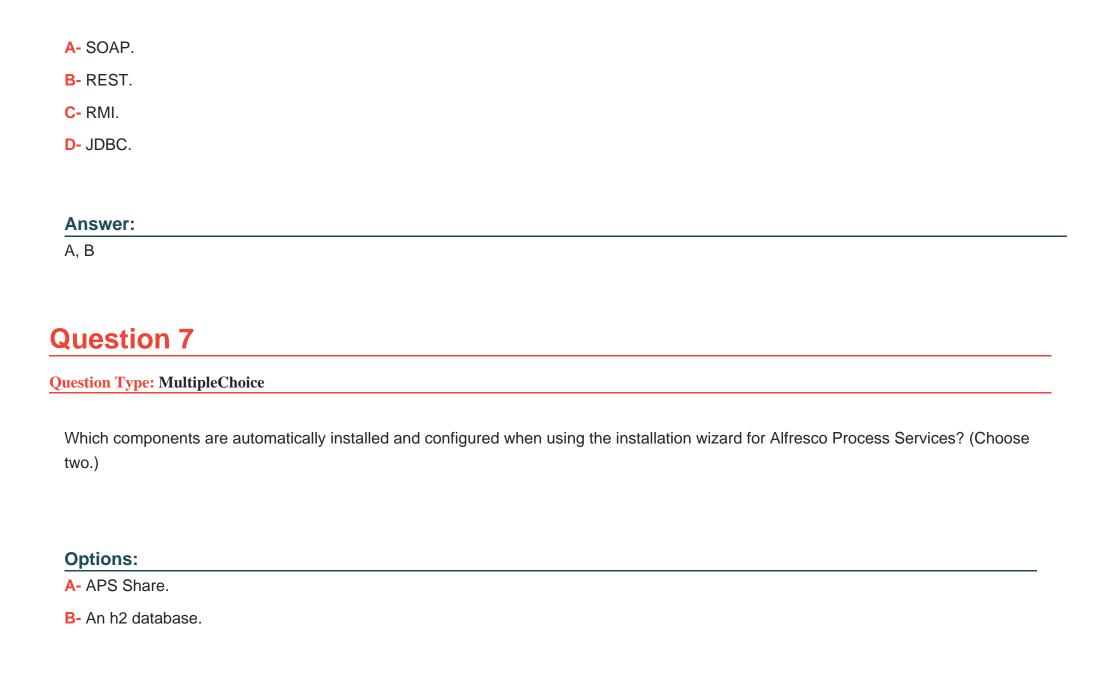

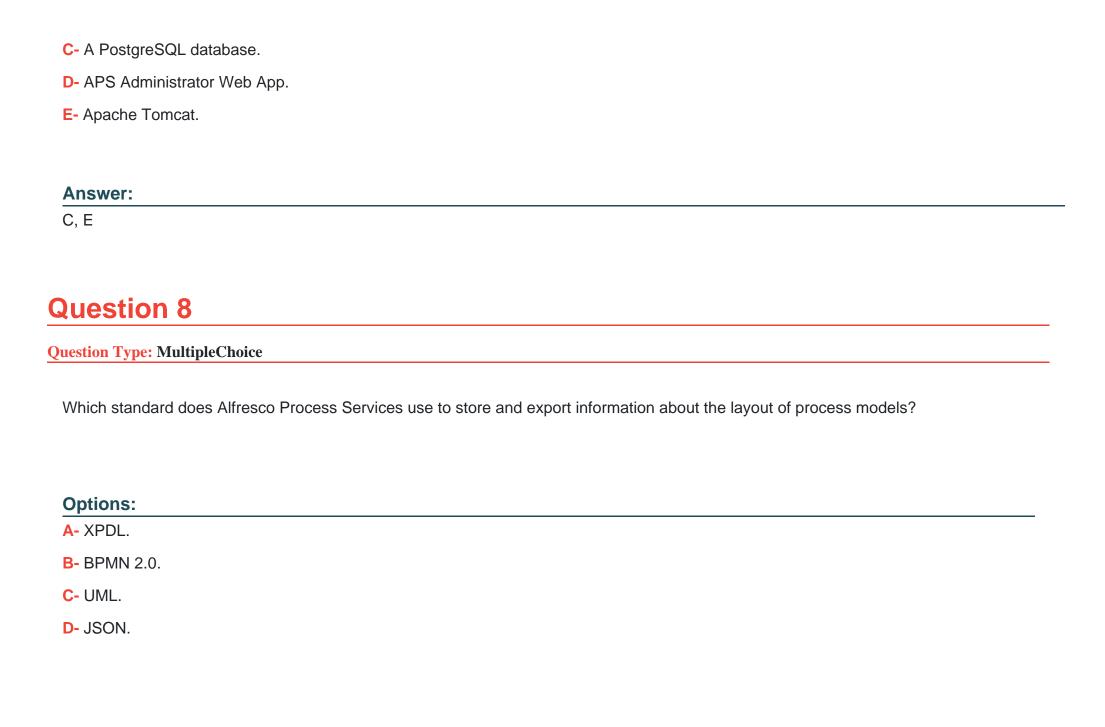

E- PNG.	
Answer:	
В	
Question 9	
uestion Type: MultipleChoice	
desiral Type. Multiple Choice	
restion Type. With the Choice	
	to impersonate another user?
When making a REST API call as an administrator, what header values allows you	to impersonate another user?
	to impersonate another user?
When making a REST API call as an administrator, what header values allows you	to impersonate another user?
	to impersonate another user?
When making a REST API call as an administrator, what header values allows you	to impersonate another user?
When making a REST API call as an administrator, what header values allows you Options:	to impersonate another user?
When making a REST API call as an administrator, what header values allows you Options: A- activiti-userName and activiti-username-type	to impersonate another user?
When making a REST API call as an administrator, what header values allows you Options: A- activiti-userName and activiti-username-type B- activiti-assume and activiti-user-value C- activiti-user and activiti-user-value-type	to impersonate another user?
When making a REST API call as an administrator, what header values allows you Options: A- activiti-userName and activiti-username-type B- activiti-assume and activiti-user-value	to impersonate another user?
When making a REST API call as an administrator, what header values allows you Options: A- activiti-userName and activiti-username-type B- activiti-assume and activiti-user-value C- activiti-user and activiti-user-value-type	to impersonate another user?

To Get Premium Files for APSCA Visit

https://www.p2pexams.com/products/apsca

For More Free Questions Visit

https://www.p2pexams.com/alfresco/pdf/apsca

