



Free Salesforce OMS-435 Practice Questions

Shared by Rowe on 13-08-2026

For More Free Questions and Preparation Resources

Check the Links on Last Page



Question 1

Question Type: MultipleChoice

On a FlexCard canvas, several fields display with Salesforce data, but one of the fields shows only the label. What could cause this?

Options:

- A- In the Setup Pabel, {recordId} is misspelled in the Data Source Input Map.
- B- The field name in the FlexCard state does not match the DataRaptorExtract's Output JSON Path name.
- C- In the FlexCard state, the Field type for the field does not match the type in the Salesforce record.
- D- There are No test Data test Parameters configured.

Answer:

B

Question 2

Question Type: MultipleChoice

A developer is configuring a DataRaptor Load to Savecontract dat

- a. The developer needs to set the record type of the contact using DeveloperName.

Which two configuration actions should the developer take to set this up in the DataRaptor Load?

Options:

- A- Check is Lookup property when mapping the fields.
- B- Add Linkto RecordType object in the Contact Object with the id field of RecordType object.
- C- Select RecordType in the Lookup object list. Development in the lookup Field list, and ID in the Lookup Requested Field list.
- D- Select RecordType in the Lookup Object list. ID in the Lookup Field list, and Development in the Lookup requested Field list.

Answer:

A, C

Question 3

Question Type: MultipleChoice

A developer creates an Integration Procedure with a Set values and a DataRaptor Extract Action that requires AccountId as a key. When the developer previews the Integration Procedure, the developer enters the AccountId correctly and executes the preview. The developer sees the dataextracted by the DataRaptor in the Debug Log, but the response is empty.

What is the likely cause of this issue?

Options:

- A- The Response cannot be previewed directly.
- B- The DataRaptor Action did not have the Add Response To Response JSON property set to true.
- C- A Response Action was not added to the Integration Procedure.
- D- The AccountId used for the preview is invalid.

Answer:

C

Question 4

Question Type: MultipleChoice

Refer to the exhibit below. What JSON code correctly represents the step in the OmniScript Structure panel shown?

A)

```

"Step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890"
  },
  "Block2": {
    "Checkbox1": false,
    "Block3": {
      "Multi-select1": "Value A;Value B"
    }
  }
}

```

B)

```

"Step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890",
    "Block2": {
      "Checkbox1": false
    }
  },
  "Block3": {
    "Multi-select1": "Value A;Value B"
  }
}

```

C)

```
"step1": {  
  "Block1": {  
    "Text1": "Text "  
  },  
  "Block2": {  
    "Telephone1": "1234567890 ",  
    "Checkbox1": false,  
    "Block3": {  
      "Multi - select1": "Value A;Value B "  
    }  
  }  
}
```

Options:

- A- Option
- B- The field name in the FlexCard state does not match the DataRaptorExtract's Output JSON Path name.
- C- Use Data JSON is Not selected in the properties of the Type Ahead Block.

Answer:

B

Question 5


Question Type: MultipleChoice

A customer sets up to LWC Omniscripts, one embedded into another. Account is set in a Set Values element in the parent Omniscript.

The AccountId set in the parent Omniscript is used to another Set Values element ContextAccountid in the embedded OmniScript. The embedded Omniscript is activated.

While previewing the OmniScript flow from the parent, it is found that Account is set correctly in the parent OmniScript. However, ContextAccountId in the embedded OmniScript is not set with the AccountId from parent Omniscript. On previewing the embedded OmniScript individually, it is found that ContextAccountId is set correctly.

What is the reason for this? Refer to the exhibit below.

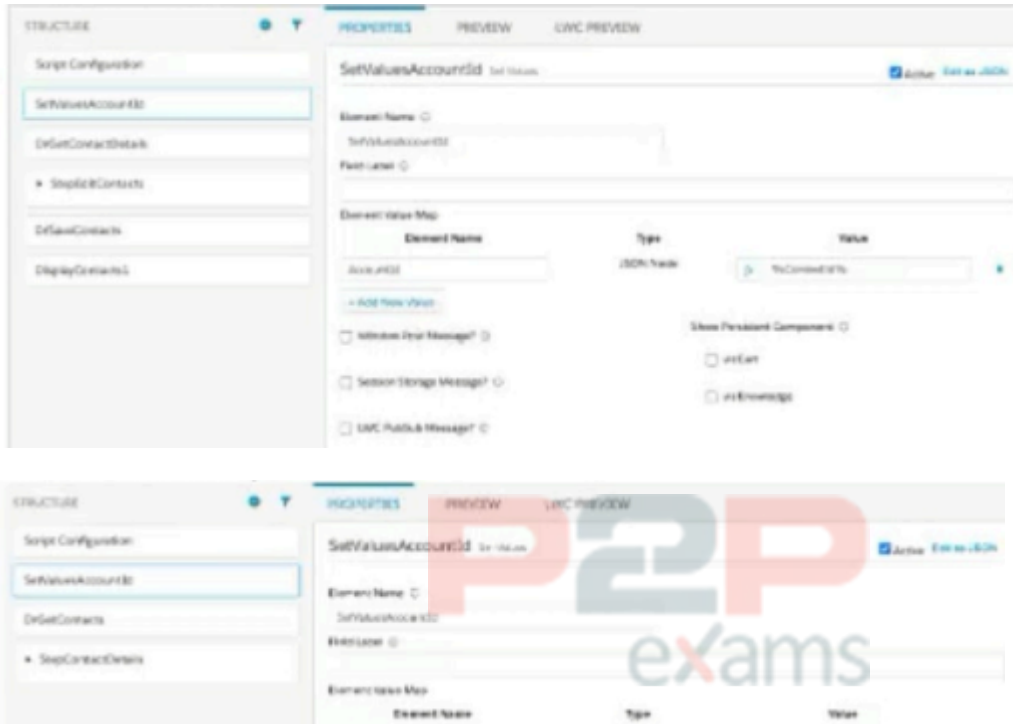

Options:

- A- Both parent and embedded OmniScripts have the same element name for the Set values element.
- B- A developer failed to include a Navigation Element to pass data from the parent OmniScript.
- C- The LWC PubSub Message flag in the Set Values action of the parent has not been set.
- D- The flag passDataJSON in the parent OmniScript is not configured correctly.

Answer:

C

Question 6

Question Type: MultipleChoice

An OmniScript updates data from one Salesforce record, but when it completes, only some of the data is updated in Salesforce. A DataRaptor Load saves the data

a. What error could cause this behavior?

Select 2 answers

Options:

- A- The fields that are not updated are read only in Salesforce.
- B- In the DataRaptor Load, in the Preview tab, the Record is from the wrong record type.
- C- The input JSON paths In the DataRaptor Load do not match the JSON from the OmniScript.
- D- ContextId is misspelled in the merge code that passes the RecordId to the DataRaptor

Answer:

A, C

Question 7

Question Type: MultipleChoice

A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy Community portal. The developer on the project decides to use an MniScript.

How should the developer configure the OmniScript to providethis functionality?

Options:

- A- Use an Edit Block element configured with Remote Actions.
- B- Use an Edit Block element configured with SOQL statements.
- C- Use an Input Block element and a DataRaptor Post Action element.
- D- Use a Text Block element and a Remote Action element.

Answer:

A

Question 8

Question Type: MultipleChoice

In a calculation procedure, What is required for the output of a calculation step to be used in an aggregation step?

Options:

- A- It must be included in constants.
- B- It must be amatrix lookup step.
- C- It must be a calculation step.

D- It must be included in the calculation output.

Answer:

D

Question 9

Question Type: MultipleChoice

A developer needs to configure a DataRaptor to retrieve data from a single object. The structure of the output data does not need to be changed.

Following best practices, which type of DataRaptor should the developer use?

Options:

- A- DataRaptor Transform
- B- DataRaptor Extract
- C- DataRaptor Load
- D- DataRaptor Turbo Extract

Answer:

D

Question 10

Question Type: MultipleChoice

A developer needs to build a multi-step intake form. Each step must allow the user to cancel the intake at any time. The developer is using an LWC OmniScript to build the form.

How should the developer implement the cancel functionality for all steps using the LWC OmniScript Designer?

Options:

- A- Check the Enable Cancel checkbox in the Setup tab under Cancel Options.
- B- Add a navigation Action inside each step and set the Component name to "Cancel",
- C- Add a navigation Action outside each step and set the Element Name to "Cancel",

D- Add a navigation Action inside each step and set the Element Name to "Cancel",

Answer:

A

Question 11

Question Type: MultipleChoice

A developer has an existing DataRaptorLoad that insert Contact records with inputs as LastName and firstName. The DataRaptor works as expected when previewed.

The developer creates an integration Procedure to test the DataRaptor and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The DataRaptor and Integration Procedure are set up as shown in the exhibit below.

The screenshot shows the 'VLOCITY DATARAPTOR BUNDLE' configuration for 'drLoadContactData'. The 'FIELDS' tab is selected, showing a table with two columns: 'INPUT JSON PATH' and 'DOMAIN OBJECT FIELD'. The table lists 'firstName' and 'lastName' in the input path column, and 'FirstName' and 'LastName' in the domain object field column. There are edit and delete icons for each row.

Interface Type	Input Type	Output Type	Required Permission (Optional)	Description
Load	JSON	SObject		

1 - Contact	
INPUT JSON PATH	DOMAIN OBJECT FIELD
firstName	FirstName
lastName	LastName

When the developer executes the Integration procedure in preview, the following error message displays: Required fields are missing: [last Name]",

How should the developer address this issue?

Options:

- A- SetValuesContactDetails should have been added to Additional input of DataRaptor Post Action in Integration Procedure
- B- The Set values Action Keys should include the DataRaptor Post Action element name path, e.g LoadContactDetails, lastname
- C- The DataRaptor Post Action in the integration procedure should have been executed before the Set Values Action
- D- The valid field names should be added in the Domain object field in theDataRaptor

Answer:

A



To Get Premium Files for OMS-435 Visit

<https://www.p2pexams.com/products/oms-435>

For More Free Questions Visit

<https://www.p2pexams.com/salesforce/pdf/oms-435>

20%
DISCOUNT

P2P
exams