



**Free Questions for MCD-Level-1 by ebraindumps**

**Shared by Goff on 15-04-2024**

**For More Free Questions and Preparation Resources**

**Check the Links on Last Page**

# Question 1

---

## Question Type: MultipleChoice

---

Refer to the exhibit. APIkit is used to generate flow components for the RAML specification.

How many apikit:router XML elements are generated to handle requests to every endpoint defined in the RAML specification?

```
orders.raml
/orders:
  get:
  post:
  /order:
    get:
    patch:
/reports:
  get:
```

### Options:

---

A- 3

B- 5

C- 2

D- 1

**Answer:**

---

D

## Question 2

---

**Question Type: MultipleChoice**

---

Refer to the exhibits. The webClient flow sends requests to the mockServer Row's HTTP Listener.

An HTTP: METHOD\_NOT\_ALLOWED error is thrown each time the webClient flow executes.

What attribute value must be changed in the webClient flow's HTTP Request operation to prevent this error from being thrown?

**Options:**

---

**A-** Change the method attribute's value to 'POST'

**B-** Change the path attribute's value to 'api/partners/fastShopping'

**C-** Change the protocol attribute's value to 'HTTPS'

**D-** Change the method attribute's value to '\*'

**Answer:**

---

A

## Question 3

---

**Question Type: MultipleChoice**

---

A Mule application configured with Autodiscovery implements an API.

Where is governance enforced for policies defined for this Mule application?

**Options:**

---

**A-** In Runtime Manager

**B-** Runtime Manager

**C-** In the Mule application

**D-** In API manager

**Answer:**

---

D

**Explanation:**

---

Correct answer is API manager

## Question 4

---

**Question Type: MultipleChoice**

---

How to import Core (dw::Core) module into your DataWeave scripts?

**Options:**

---

**A-** #include dw::core

**B-** Not needed

**C-** import core

**D-** import dw::core

**Answer:**

---

B

**Explanation:**

---

Correct answer is Not needed as dw::core module is included by default. We don't need to include it explicitly

## Question 5

---

**Question Type:** MultipleChoice

---

What are the latest specification of RAML available?

**Options:**

---

**A-** 1.2

**B- 1**

**C- 0.8**

**D- 2**

**Answer:**

---

B

**Explanation:**

---

The current version of the RAML specification is 1.0

You can check RAML version in RAML definition by referring to first comment. See highlighted part in below image.

```
1  #%RAML 1.0
2  title: American Flights API
3
4  types:
5    AmericanFlight: !include /exchange_modules/68ef9520-24e9-4cf2-b2f5-
6    training-american-flight-data-type/1.0.1/AmericanFlightDataType.raml
7  traits:
```

## Question 6

---

Question Type: MultipleChoice

---

How does APIkit determine the number of flows to generate from a RAML specification?



### Options:

---

- A- Creates a separate flow for each resource
- B- Creates a separate flow for each HTTP method
- C- Creates a separate flow for each response status code
- D- Creates a separate flow for each resource that contains child resources

### Answer:

---

B

### Explanation:

---

APIKit Creates a separate flow for each HTTP method

## Question 7

---

**Question Type:** MultipleChoice

---

According to Semantic Versioning, which version would you change for incompatible API changes?

### Options:

---

- A- No change
- B- MINOR
- C- MAJOR
- D- PATCH

### Answer:

---

C

### Explanation:

---

Correct answer is MAJOR

MAJOR version when you make incompatible API changes, MINOR version when you add functionality in a backwards compatible manner, and PATCH version when you make backwards compatible bug fixes.


For details refer to this documentation : <https://semver.org/>

## Question 8

---

**Question Type: MultipleChoice**

Refer to the payload.

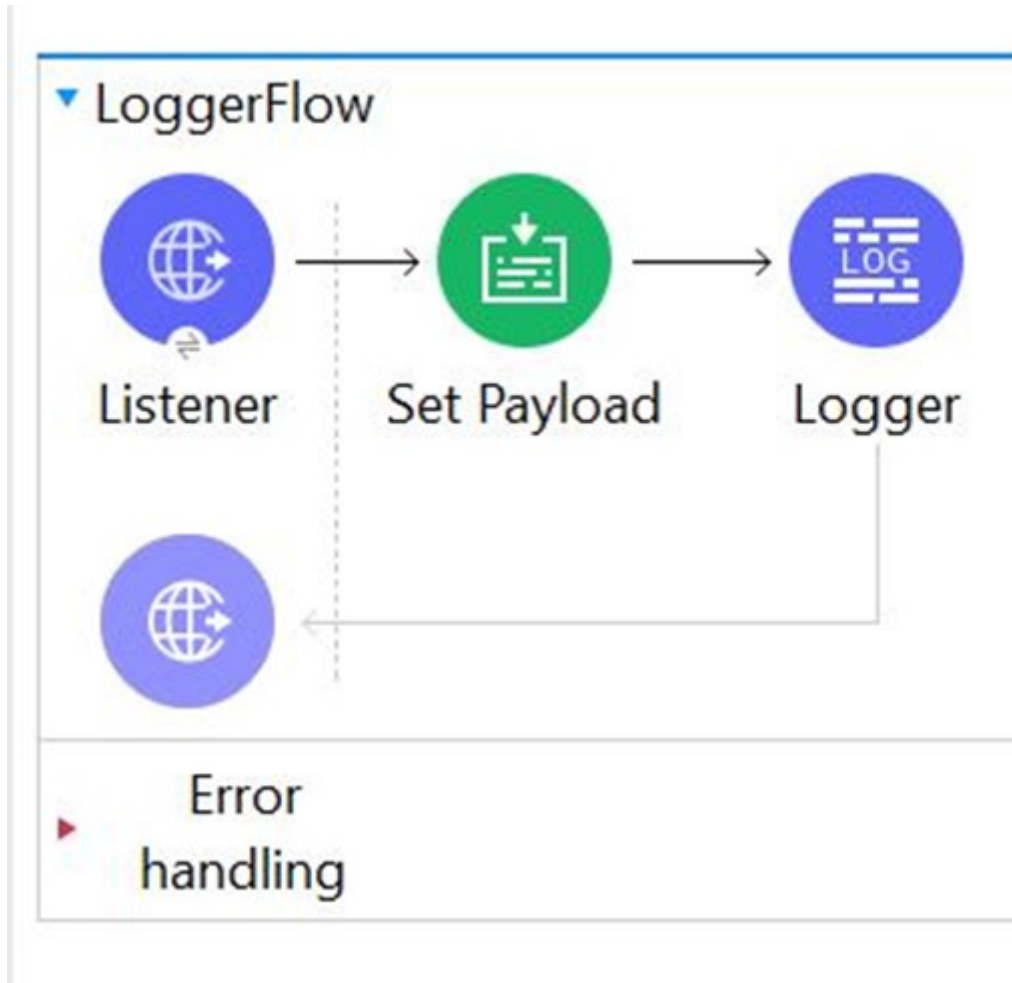

```
<flow name="LoggerFlow" doc:id="d5015e61-b3b5-4833-8c5e-ed176a3f6cb0" >
  <http:listener doc:name="Listener" doc:id="5ae3d668-7075-4236-a523-a08b03186b53" config-ref="HTTP_Listener_config" path="/Log" />
  <set-payload value="#[{
    &#10; "student": {
    &#10;   "name": "Anay",
    &#10;   "age": 6
    &#10; }
    &#10;}]'" doc:name="Set Payload" doc:id="7763301e-1fed-48fc-968d-47c1b113c867" />
  <logger level="INFO" doc:name="Logger" doc:id="8e1c416b-78bd-44fb-b0db-cd5b3d382c6d" message='Result #["INFO"++ payload]' />
</flow>
```

The Set payload transformer sets the payload to an object. The logger component's message attribute is configured with the string "Result #["INFO"++ payload]"

What is the output of logger when this flow executes?

### Options:

---

- A- Result INFOpayload
- B- Result INFO{'student':{'name':'Anay','age':6}}
- C- 1. 1. 'You called the function '++' with these arguments:  
2. 2. 1: String ('INFO')  
3. 3: Object ({student: {name: 'Anay' as String {class: 'java.lang.String'},age: 6 as Numbe...})
- D- Error : You evaluated inline expression # without ++

### Answer:

---

C

## **Explanation:**

---

Correct answer is as below as concatenation operation works only with string and not with the objects. In this case payload is object.

'You called the function '++' with these arguments:

1: String ('INFO')

2: Object ({student: {name: 'Anay' as String {class: 'java.lang.String'}},age

**To Get Premium Files for MCD-Level-1 Visit**

**<https://www.p2pexams.com/products/mcd-level-1>**

**For More Free Questions Visit**

**<https://www.p2pexams.com/mulesoft/pdf/mcd-level-1>**

