



Oracle 1Z0-1042-25 Mock Exam

Shared by Berger on 17-06-2026

For More Free Questions and Preparation Resources

Check the Links on Last Page



Question 1

Question Type: MultipleChoice

In Oracle Integration (OIC), you are designing an integration flow that processes customer orders. You need to enforce a specific validation rule that if an order contains more than 10 items, it must be rejected with an appropriate error message. Which is a valid approach for leveraging the Throw New Fault action in your integration to achieve this requirement?

Options:

- A- Create a separate integration flow to handle the error message, and then call it using the Throw New Fault action if the order item count is greater than 10.
- B- Create a scope, add the Throw New Fault action using an If-then branch to check the order item count, then throw the fault if the count is greater than 10.
- C- Implement the validation rule using a For-each action, and then use the Throw New Fault action within the first iteration if the count is greater than 10.
- D- Add the Throw New Fault action as the first activity in the main flow defining the error message, then configuring the Skip condition to be if the count is not greater than 10.

Answer:

B

Question 2

Question Type: MultipleChoice

In Oracle Integration (OIC), you are working on an integration that uses a REST trigger, which will require authentication. You need to ensure that only authorized clients can access the integration. Which approach should you use?

Options:

- A- Configure the REST Adapter to use the Basic Authentication or OAuth 2.0 security policy.
- B- Enable Cross-Origin Resource Sharing (CORS) and set an API key in the REST Adapter configuration.
- C- Set up an IP whitelist in the OIC instance, allowing only specific IP addresses to access the integration.
- D- Encrypt the payload using a custom encryption algorithm and provide the decryption key to authorized clients.

Answer:

A

Question 3

Question Type: MultipleChoice

Which Oracle Integration (OIC) adapter can be used to create a configured connection within an integration allowing you to send a file to the embedded File Server associated within the same OIC environment?



Options:

- A- File Adapter
- B- Local Adapter
- C- FTP Adapter
- D- REST Adapter


Answer:

A

Question 4

Question Type: MultipleChoice

You need to create a schedule pattern integration that is based on an existing application pattern integration. How can this be achieved while using the same display name as the original integration?

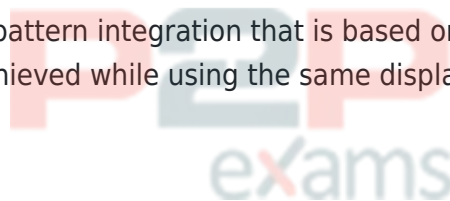

Options:

- A- You can create the new integration as a different major version of the existing one.
- B- You can create the new integration from scratch by using the same display name and specifying a different identifier.
- C- You can clone the existing integration and specify it to use the schedule pattern instead of the application pattern.
- D- You can use the convert tool to change from the application pattern to the schedule pattern.

Answer:

C

Question 5

Question Type: MultipleChoice

When defining the frequency for scheduled orchestration style integration runs, you can choose either Basic or the Advanced option. Which expression format is used for defining advanced scheduled runs?



Options:

- A- iCal
- B- cron
- C- YAML
- D- Groovy

Answer:

A

Question 6

Question Type: MultipleChoice

A company has been using Oracle Integration Cloud (OIC) to integrate its business applications, such as Oracle HCM Cloud, Oracle ERP Cloud, and Salesforce. However, they are planning to migrate some of their integration workloads from their current OIC instance to a new instance in a different region to comply with data sovereignty regulations. Which statement is true regarding the exporting and importing of integrations?

Options:

- A- To change an integration identifier or version, you can manually edit the exported integration (IAR) file before importing it into another instance.
- B- You cannot import an integration if it already exists with the same identifier and version.
- C- You can export an integration either as a separate file (IAR) or bundled in a package (PAR) and it will still contain the connection resources.
- D- You can import a package containing activated integrations.

Answer:

B

Question 7

Question Type: MultipleChoice

Which certificate type involves the uploading of a keystore (.jks) file to Oracle Integration (OIC) to facilitate two-way SSL communication with external services?

Options:

- A- SAML
- B- PGP
- C- X.509
- D- Signing key

Answer:

C

Question 8

Question Type: MultipleChoice

You are creating integrations in Oracle Integration Cloud (OIC) using B2B trading partner agreements. Which identifier is implicitly used for all outbound agreements?

Options:

- A- EDI Interchange Internal Sub ID
- B- EDI Interchange ID
- C- Application Partner ID
- D- EDI Group ID Qualifier

Answer:

B

Question 9

Question Type: MultipleChoice

As an integration developer, you are creating an integration in Oracle Integration Cloud (OIC) to transform a payload with multiple orders. You need to configure a for-each action to loop through each order and process them individually. How do you correctly configure the for-each action to loop through each order and process them individually?

Options:

- A- Select the Parallel Processing option and set the number of threads to the number of orders.
- B- Select the Group By option and group the orders by the order number.
- C- Select the Repeating Element field and map the source element that contains the orders.
- D- Select the Sequential Processing option and set the batch size to the number of orders.

Answer:

C

Question 10

Question Type: MultipleChoice

You can recover unsaved changes in an Oracle Integration Cloud (OIC) integration that crashes during design time because of a browser crash, loss of network connectivity, or a server going down. Which statement is NOT true about the unsaved changes feature in OIC?

Options:

- A- A user with the ServiceAdministrator role can recover the unsaved changes.
- B- A user with the ServiceAdministrator role can unlock an integration that has unsaved changes.
- C- Changes made while editing a Connections page cannot be recovered.
- D- Changes made while working inside a data mapper cannot be recovered.
- E- A backup copy is created after each complete task, therefore there is no time limit to logging back in and recovering the changes.

Answer:

D

To Get Premium Files for 1Z0-1042-25 Visit

<https://www.p2pexams.com/products/1z0-1042-25>

For More Free Questions Visit

<https://www.p2pexams.com/oracle/pdf/1z0-1042-25>

20%
DISCOUNT

P2P
exams