UiPath-ADAv1 Practice Questions

Shared by Garner on 16-11-2026

For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Question Type: MultipleChoice

Which of the following statements accurately describes the function of the If activity in a workflow?

Options:

A- It evaluates a boolean condition and creates two separate branches for both true and false conditions, executing only one branch.
B- It evaluates a boolean condition and runs the branch with the highest priority, regardless of the condition's truthiness.
C- It evaluates a set of boolean conditions and branches the workflow execution to the first true condition encountered.
D- It evaluates a boolean condition and creates a single branch that executes both true and false statements sequentially.

Answer:

A

Question 2

Question Type: MultipleChoice

What is the expected behavior when execution is started from UiPath Studio in Debug mode with a breakpoint on a Type Into activity?

Options:

A- The execution pauses for 5 seconds when it encounters the breakpoint.
B- The execution ignores the breakpoint.
C- The execution pauses until the user clicks the Continue button.
D- The execution throws an exception.

Answer:

C

Question 3

Question Type: MultipleChoice

What is the best method for passing data across activities within workflows?

Options:

A- Arguments
B- Variables
C- Namespaces
D- Properties

P2P exams

Answer:

A

Question 4

Question Type: MultipleChoice

A developer is building a process that types data into input fields using the Hardware Events input method. Which property of the Type Into activity should be modified to reduce the pace at which the input string characters are typed into the fields?

Options:

A- Delay before
B- Alter disabled element
C- Delay between keys
D- Delay after

P2P exams

Answer:

C

Question 5

Question Type: MultipleChoice

Which option best is an outcome of converting a personal workspace into a folder in UiPath Orchestrator?

Options:

A- The owner of the initial workspace is added by default to the newly created folder and assigned the Folder Administrator role.
B- The owner of the initial workspace and the admin user are added by default to the newly created folder and assigned the Personal Workspace Administrator role.
C- The admin user is added by default to the newly created folder with the User Administrator role.
D- The owner of the initial workspace loses access to the newly created folder and the existing admin users are added by default.

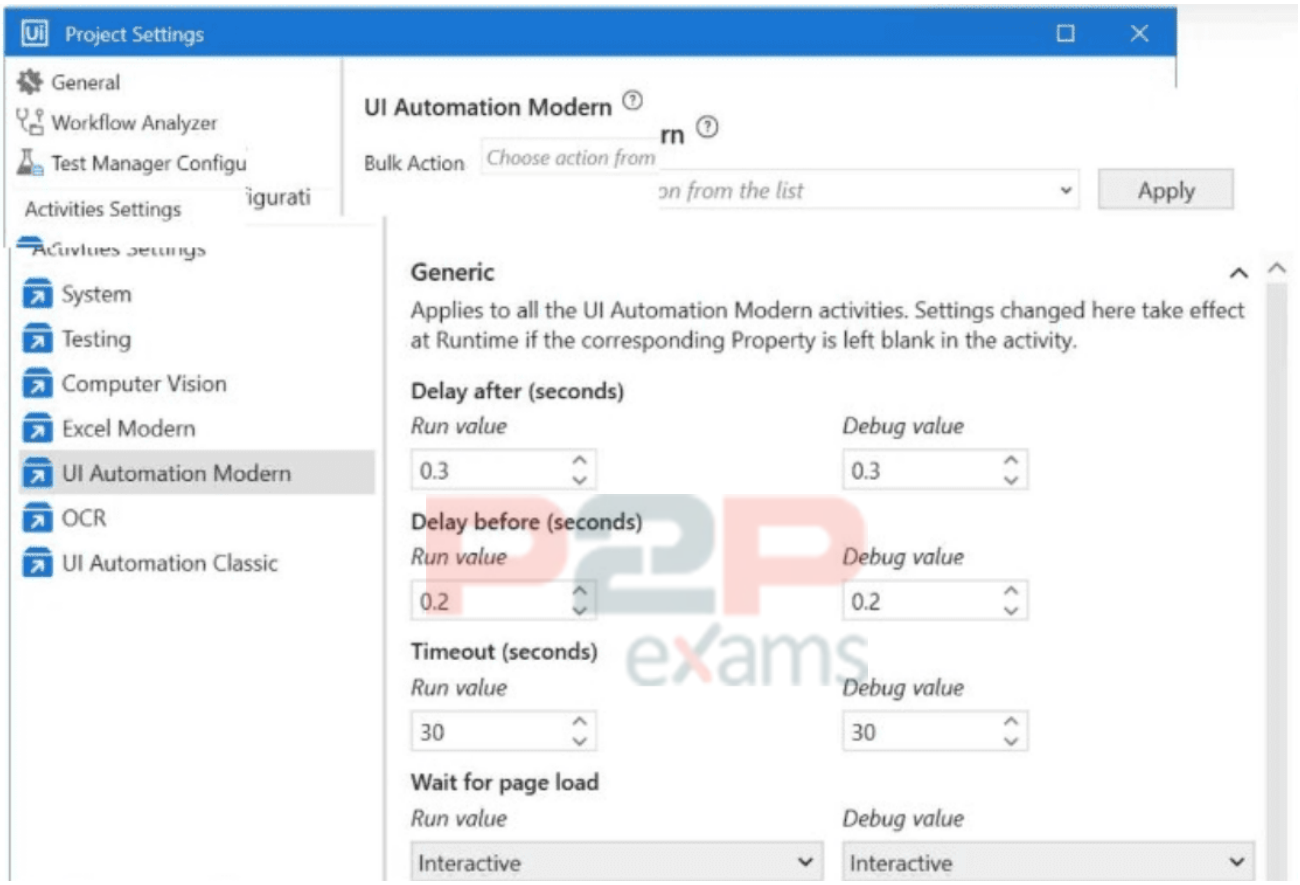
Answer:

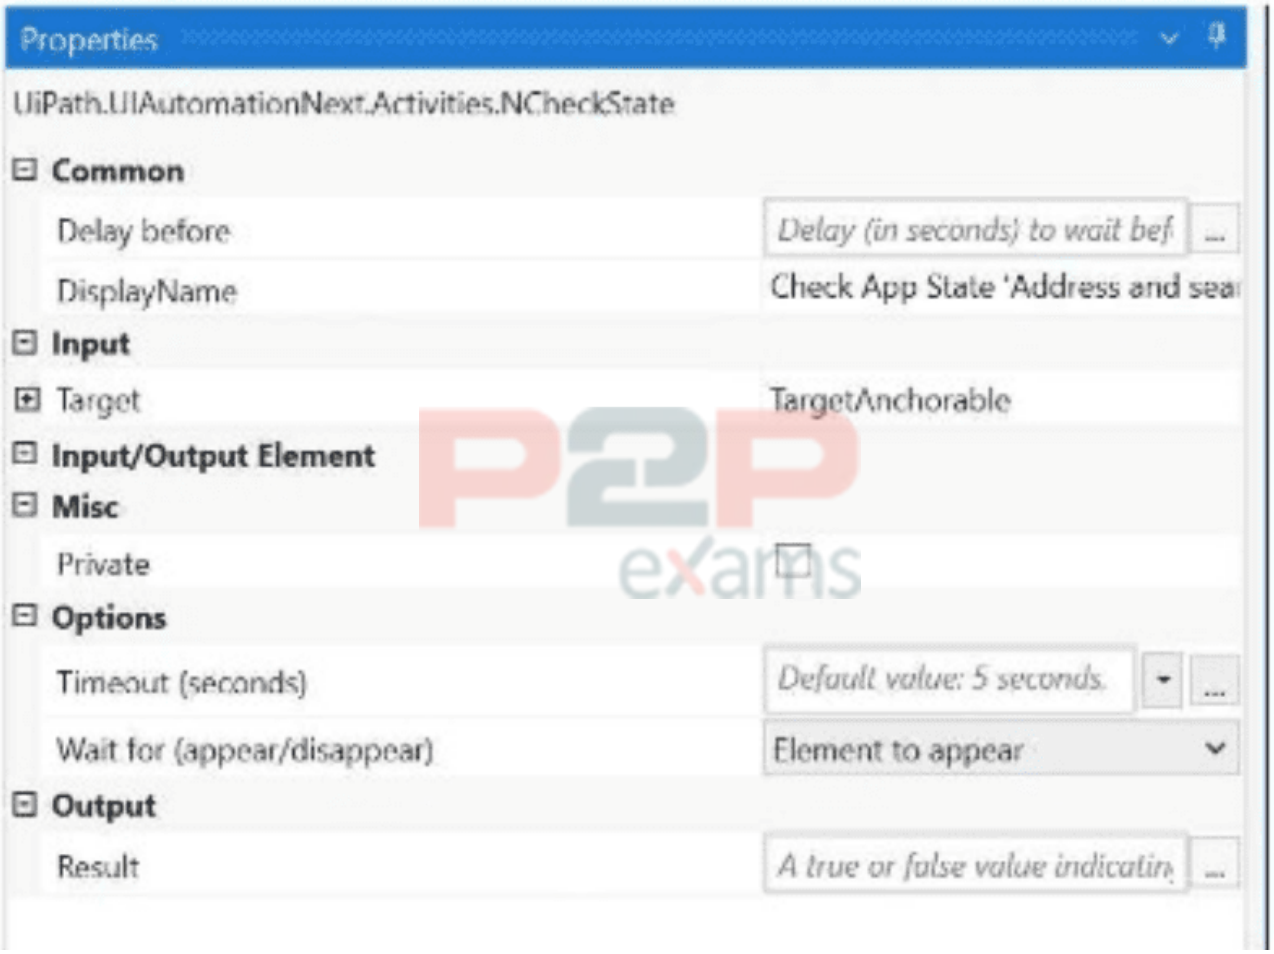
A

Question 6

Question Type: MultipleChoice

A developer has configured the Project Settings for UI Automation Modern and added a Check App State activity In the project, as shown below.


Project Settings
General
Workflow Analyzer
Test Manager Configu
Activities Settings
System
Testing
Computer Vision
Excel Modern
UI Automation Modern
OCR
UI Automation Classic
UI Automation Modern
Bulk Action
Choose action from
Apply
Generic
Applies to all the UI Automation Modern activities. Settings changed here take effect at Runtime if the corresponding Property is left blank in the activity.
Delay after (seconds)
Run value
Debug value
0.3
0.3
Delay before (seconds)
Run value
Debug value
0.2
0.2
Timeout (seconds)
Run value
Debug value
30
30
Wait for page load
Run value
Debug value
Interactive
Interactive


Properties
UiPath.UIAutomationNext.Activities.NCheckState
Common
Delay before
Delay (in seconds) to wait bef
DisplayName
Check App State 'Address and sea
Input
Target
TargetAnchorable
Input/Output Element
Misc
Private
Options
Timeout (seconds)
Default value: 5 seconds
Wait for (appear/disappear)
Element to appear
Output
Result
A true or false value indicatin

Options:

A- 0 seconds
B- 0.2 seconds
C- 0.3 seconds
D- 30 seconds

Answer:

B

Question 7

Question Type: MultipleChoice

When would you need to manually add multiple anchors to a UI element while creating a descriptor in UiPath?

Options:

A- When multiple similar elements, such as duplicate text boxes with identical labels, need to be distinguished by adding both the label and a section title as anchors.
B- When a single anchor is found automatically and it perfectly identifies the target element without duplicates.
C- When the target element is unique, but the strict selector is enabled as a targeting method.
D- When the target is an image element that always has a single text label anchor below it.

Answer:

A

To Get Premium Files for UiPath-ADAv1
Visit

https://www.p2pexams.com/products/uipath-adav1

For More Free Questions Visit

https://www.p2pexams.com/uipath/pdf/uipath-adav1

