



**Download VMware 3V0-22.21 Exam Dumps Free**

Shared by Guerra on 17-06-2026

**For More Free Questions and Preparation Resources**

Check the Links on Last Page



# Question 1

---

Question Type: MultipleChoice

---

You have just deployed a new vCenter Server Appliance. Vcsa01

a. and are required to back up to configuration after deployment. To complete this task, perform an unencrypted backup of the vCenter Server Appliance using the following details:

\* Use the FTP protocol to backup the appliance

\* FTP Server Location: 172.20.10.10/

\* FTP Username: administrator

\* FTP Password: VMware1!

Note: Make sure you include the / at the end of the Server Location

## Options:

---

A- Explanation:

Prerequisites

You must have an FTP, FTPS, HTTP, HTTPS, or SCP server up and running with sufficient disk space to store the backup.

Dedicate a separate folder on your server for each file-based backup.

Procedure

In a Web browser, go to the vCenter Server Appliance Management Interface, <https://appliance-IP-address-or-FQDN:5480>.

Log in as root.

In the vCenter Server Appliance Management Interface, click Summary.

Click Backup.

The Backup Appliance wizard opens.

Enter the backup protocol and location details.

Option

Description

Backup protocol

Select the protocol to use to connect to your backup server. You can select FTP, FTPS, HTTP, HTTPS, or SCP.

For FTP, FTPS, HTTP, or HTTPS the path is relative to the home directory configured for the service. For SCP, the path is absolute to the remote systems root directory.

Backup location

Enter the server address and backup folder in which to store the backup files.

Port

Enter the default or custom port of the backup server.

User name

Enter a user name of a user with write privileges on the backup server.

Password

Enter the password of the user with write privileges on the backup server.

(Optional) Select **Encrypt Backup Data** to encrypt your backup file and enter a password for the encryption.

If you select to encrypt the backup data, you must use the encryption password for the restore procedure.

Click **Next**.

On the **Select parts to backup** page, review the data that is backed up by default.

(Optional) Select **Stats, Events, and Tasks** to back up additional historical data from the database.

(Optional) In the **Description text box**, enter a description of the backup and click **Next**.

On the **Ready to complete** page, review the summary information for the backup and click **Finish**.

The **Backup Progress** window opens and indicates the progress of the backup operation.

After the backup process finishes, click **OK** to close the **Backup Progress** window.

Results

You successfully created a backup file of the vCenter Server Appliance.

Answer:

---

A

## Question 2

---

Question Type: MultipleChoice

---

The security team has decided to follow the VMware-recommended best practices in the vSphere hardening guide.

esxi02b:

Your first task is to create a local user in esxi02b:

\* Name: SpecialUser

\* Role: Administrator

Your second task is to ensure that SpecialUser is the ONLY user who is able to SSH into esxi02b via Putty.

Your final task is to enforce a strict lockdown on esxi02b.

Your second task is to ensure that SpecialUser is the ONLY user who is able to SSH into esxi02b via Putty.

Your final task is to enforce a strict lockdown on esxi02b.

## Options:

---

### A- Explanation:

Authentication and authorization govern access.vCenter Single Sign-On supports authentication, which means it determines whether a user can access vSphere components at all. Each user must also be authorized to view or manipulate vSphere objects.

vSphere supports several different authorization mechanisms, discussed in Understanding Authorization in vSphere. The focus of the information in this section is how the vCenter Server permission model works and how to perform user management tasks.

vCenter Server allows fine-grained control over authorization with permissions and roles. When you assign a permission to an object in the vCenter Server object hierarchy, you specify which user or group has which privileges on that object. To specify the privileges, you use roles, which are sets of privileges.

Initially, only the administrator user for the vCenter Single Sign-On domain, administrator@vsphere.local by default, is authorized to log in to the vCenter Server system. That user can then proceed as follows:

Add an identity source in which users and groups are defined to vCenter Single Sign-On. See the Platform Services Controller Administration documentation.

Give privileges to a user or group by selecting an object such as a virtual machine or a vCenter Server system and assigning a role on that object for the user or group.

## Answer:

---

A

## Question 3

---

Question Type: MultipleChoice

---

The company's IT strategy is to adopt innovative and emerging technologies such as software-defined storage solution. The IT team has decided to run their business-critical workloads on an all-flash Virtual SAN (vSAN) as it provides excellent performance.

The IT team has purchased servers that are compatible with vSAN. However, all the solid-state drives (SSD) in the servers are shown incorrectly as hard-disk drives (HDD) instead.

In addition, some of the solid-state drives (SSD) will be used for other purposes instead of vSAN and should not be part of the vSAN cluster. These are the requirements for the vSAN cluster:

- \* In each server, use the 3GB SSD as the cache tier and the 11GB SSD as the capacity tier
- \* As a result the vSAN cluster will use a total of six SSDs (three SSDs for caching and three SSDs for capacity)
- \* Ensure all the disks that will be used for vSAN are shown correctly as SSDs

\* Provide storage savings by using deduplication and compression.

Next, the IT team wants to improve the performance and availability of the business-critical workloads on the vSAN-datastore.

Ensure the following configurations will be applied on existing and new workloads located on vSAN-datastore:

Number of disk stripes per object: 2

Primary level of failures to tolerate: 2

Failure tolerance method: RAID-1 (Mirroring)

Force provisioning; Yes

The new configurations should be applied by default.

You may create new storage policy but do not edit the default vSAN storage policy as it may be used by other vSAN clusters in the future. Name the policy "New vSAN Default".

Note-. All tasks should be executed in PROD-A host cluster.

## Options:

---

A- Explanation:

VMware vSphere ESXi can use locally attached SSDs (Solid State Disk) and flash devices in multiple ways. Since SSDs offer much higher throughput and much lower latency than traditional magnetic hard disks the benefits are clear. While offering lower throughput and higher latency, flash devices such as USB or SATADOM can also be appropriate for some use cases. The potential drawback to using SSDs and flash device storage is that the endurance can be significantly less than traditional magnetic disks and it can vary based on the workload type as well as factors such as the drive capacity, underlying flash technology, etc.

This KB outlines the minimum SSD and flash device recommendations based on different technologies and use case scenarios.

SSD and Flash Device Use Cases

A non-exhaustive survey of various usage models in vSphere environment are listed below.

Host swap cache

This usage model has been supported since vSphere 5.1 for SATA and SCSI connected SSDs. USB and low end SATA or SCSI flash devices are not supported.

The workload is heavily influenced by the degree of host memory over commitment.

Regular datastore

A (local) SSD is used instead of a hard disk drive.

This usage model has been supported since vSphere 7.0 for SATA and SCSI connected SSDs.

There is currently no support for USB connected SSDs or for low end flash devices regardless of connection type.

vSphere Flash Read Cache (aka Virtual Flash)

This usage model has been supported since vSphere 5.5 for SATA and SCSI connected SSDs. There is no support for USB connected SSDs or for low end flash devices.

#### vSAN

This usage model has been supported since vSphere 5.5 for SATA and SCSI SSDs. For more information, see the vSAN Hardware Quick Reference Guide.

#### vSphere ESXi Boot Disk

A USB flash drive or SATADOM or local SSD can be chosen as the install image for ESXi, the vSphere hypervisor, which then boots from the flash device.

This usage model has been supported since vSphere 3.5 for USB flash devices and vSphere 4.0 for SCSI/SATA connected devices.

Installation to SATA and SCSI connected SSD, SATADOM and flash devices creates a full install image which includes a logging partition (see below) whereas installation to a USB device creates a boot disk image without a logging partition.

#### vSphere ESXi Coredump device

The default size for the coredump partition is 2.5 GiB which is about 2.7 GB and the installer creates a coredump partition on the boot device for vSphere 5.5 and above. After installation the partition can be resized if necessary using partedUtil. For more information, see the vSphere documentation.

Any SATADOM or SATA/SCSI SSD may be configured with a coredump partition.

This usage model has been supported from vSphere 3.5 for boot USB flash devices and since vSphere 4.0 for any SATA or SCSI connected SSD that is local.

This usage model also applies to Autodeploy hosts which have no boot disk.

#### vSphere ESXi Logging device

A SATADOM or local SATA/SCSI SSD is chosen as the location for the vSphere logging partition (/scratchpartition). This partition may be but need not be on the boot disk and this applies to Autodeploy hosts which lack a boot disk.

This usage model has been supported since vSphere 7.0 for any SATA or SCSI connected SSD that is local. SATADOMs that meet the requirement set forth in Table 1 are also supported.

This usage model can be supported in a future release of vSphere for USB flash devices that meet the requirement set forth in Table 1.

#### SSD Endurance Criteria

The flash industry often uses Tera Bytes Written (TBW) as a benchmark for SSD endurance. TBW is the number of terabytes that can be written to the device over its useful life. Most devices have distinct TBW ratings for sequential and random IO workloads, with the latter being much lower due to Write Amplification Factor (WAF) (defined below). Other measures of endurance commonly used are DWPD (Drive Writes Per Day) and P/E (Program/Erase) cycles.

Conversion formulas are provided here:

Converting DWPD (Drive Writes Per Day) to TBW (Terabytes Written):

$$\text{TBW} = \text{DWPD} * \text{Warranty (in Years)} * 365 * \text{Capacity (in GB)} / 1,000 \text{ (GB per TB)}$$

Converting Flash P/E Cycles per Cell to TBW (Terabytes Written):

$$\text{TBW} = \text{Capacity (in GB)} * (\text{P/E Cycles per Cell}) / (1,000 \text{ (GB per TB)} * \text{WAF})$$

WAF is a measure of the induced writes caused by inherent properties of flash technology. Due to the difference between the storage block size (512 bytes), the flash cell size (typically 4KiB or 8KiB bytes) and the minimum flash erase size of many cells one write can force a number of induced writes due to copies, garbage collection, etc. For sequential workloads typical WAFs fall

in the range of single digits while for random workloads WAFs can approach or even exceed 100. Table 1 contains workload characterization for the various workloads excepting the Datastore and vSphere Flash Read Cache workloads which depend on the characteristics of the Virtual Machines workloads being run and thus cannot be characterized here. A WAF from the table can be used with the above P/E to TBW formula.

Answer:

---

A

## Question 4

---

Question Type: MultipleChoice

---

Due to budget constraints, the development team must place its virtual machines on the same ESXi hosts as the production virtual machines. In order to prevent resource contention caused by the development workload, you must limit their resources.

On Cluster PROD-A create a resource pool under this cluster for future development VMs. Create a 4 GHz CPU limit and a 256 MB memory limit

\* Cluster Name: PROD-A

\* Resource Pool Name: DevRP

\* CPU Limit: 4 GHz

\* Memory Limit: 256 MB

Options:

---

A- Send us your suggestions.

Answer:

---

A

## Question 5

---

Question Type: MultipleChoice

---

Your storage administrator is concerned about a new application being deployed on virtual machine (SIOCVM) in your vSphere 7.x environment.

You've been asked to create and apply a storage policy to make sure that the SIOCVM virtual machine does not exceed 500 IOPS.

Note: Name the Storage Policy 500IOPSLimit

## Options:

---

### A- Explanation:

#### Storage I/O Control v2

Storage I/O Control (SIOC) was initially introduced in vSphere 4.1 to provide I/O prioritization of virtual machines running on a cluster of ESXi hosts that had access to shared storage. It extended the familiar constructs of shares and limits, which existed for CPU and memory, to address storage utilization through a dynamic allocation of I/O queue slots across a cluster of ESXi servers. The purpose of SIOC is to address the 'noisy neighbor' problem, i.e. a low priority virtual machine impacting other higher priority virtual machines due to the nature of the application and its I/O running in that low priority VM.

vSphere 5.0 extended SIOC to provide cluster-wide I/O shares and limits for NFS datastores. This means that no single virtual machine should be able to create a bottleneck in any environment regardless of the type of shared storage used. SIOC automatically throttles a virtual machine which is consuming a disparate amount of I/O bandwidth when the configured latency threshold has been exceeded. To allow other virtual machines receive their fair share of I/O bandwidth on the same datastore, a share based fairness mechanism has been created which now is supported on both NFS and VMFS.

vSphere 5.1 introduced a new SIOC feature called Stats Only Mode. When enabled, it doesn't enforce throttling but gathers statistics to assist Storage DRS. Storage DRS now has statistics in advance for new datastores being added to the datastore cluster & can get up to speed on the datastores profile/capabilities much quicker than before.

Another 5.1 feature was Automatic Threshold Computation. The default latency threshold for SIOC is 30ms. Not all storage devices are created equal so this default was chosen as a sort of "catch-all". There are certain devices which will hit their natural contention point much earlier than others, for example All Flash Arrays, in which case the threshold should be lowered by the user. However, manually determining the correct latency can be difficult for users. This gave rise to the need for the latency threshold to get automatically determined at a correct level for each device. Using the I/O injector modeling of SIOC, peak throughput and corresponding latency of a datastore is measured. The latency threshold value at which Storage I/O Control will kick in is then set to 90% of this peak value (by default). vSphere administrators can change this 90% to another percentage value or they can still input a millisecond value if they so wish.

The default latency threshold for SIOC can be reduced to as low as 5ms.

#### SIOC V1 Overview

SIOC V1 is disabled by default. It needs to be enabled on a per datastore level, and it is only utilized when a specific level of latency has been reached. By default, the latency threshold for a datastore is set to 30ms, as mentioned earlier. If SIOC is triggered, disk shares (aggregated from all VMDKs using the datastore) are used to assign I/O queue slots on a per host basis to that datastore. In other words, SIOC limits the number of IOs that a host can issue. The more

VMs/VMDKs that run on a particular host, the higher the number of shares, and thus the higher the number of IOs that that particular host can issue. The throttling is done by modifying the device queue depth of the various hosts sharing the datastore. When the period of contention passes, and latency returns to normal values, the device queue depths are allowed to return to default values on each host.

### SIOC V2 Introduction


Before describing SIOC V2, it should be highlighted that SIOC V1 and SIOC V2 can co-exist on vSphere 6.5. This makes it much simpler when considering upgrades, or migrations between versions. With that in mind, SIOC V2 is considerably different from a user experience perspective when compared to V1. SIOCv2 is implemented using IO Filter framework Storage IO Control category. SIOC V2 can be managed using SPBM Policies. What this means is that you create a policy which contains your SIOC specifications, and these policies are then attached to virtual machines.

### Creating an SIOC policy based

Creating an SIOC policy is done is exactly the same way as building a storage policy for VSAN or Virtual Volumes. Select the VM Storage Policy from the vSphere client home page, and from there select the option to create a new VM Storage Policy. VM Storage Policies in vSphere 6.5 has a new option called "Common Rules". These are used for configuring data services provided by hosts, such as Storage I/O Control and Encryption.


### Use common rules in the VM storage policy

The first step is to click on the check box to enabled common rules. This will then allow you to add components, such as SIOC, to the policy.

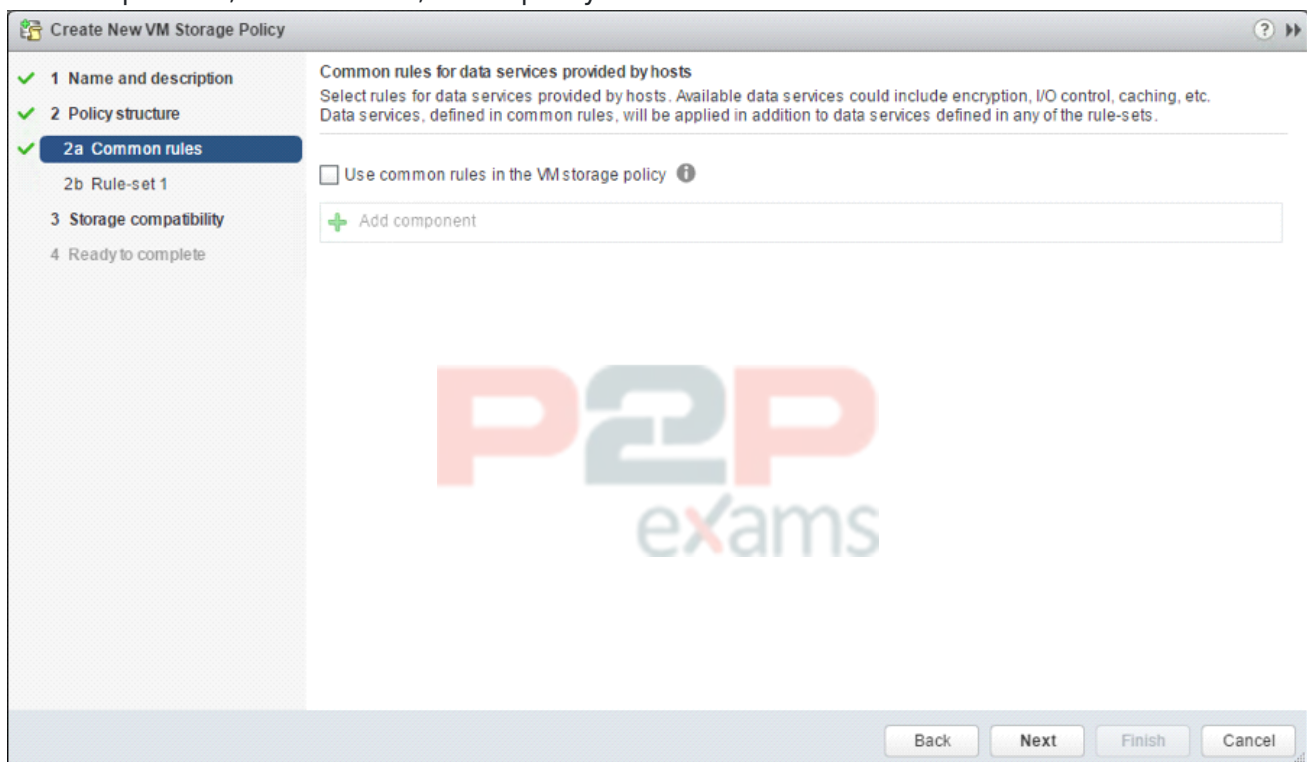

### Add Component -- Storage I/O Control

In vSphere 6.5, there are two components available for common rules, Encryption and Storage I/O Control. Select Storage I/O Control in this case. Now you can select Normal, High, Low or Custom shares allocation.

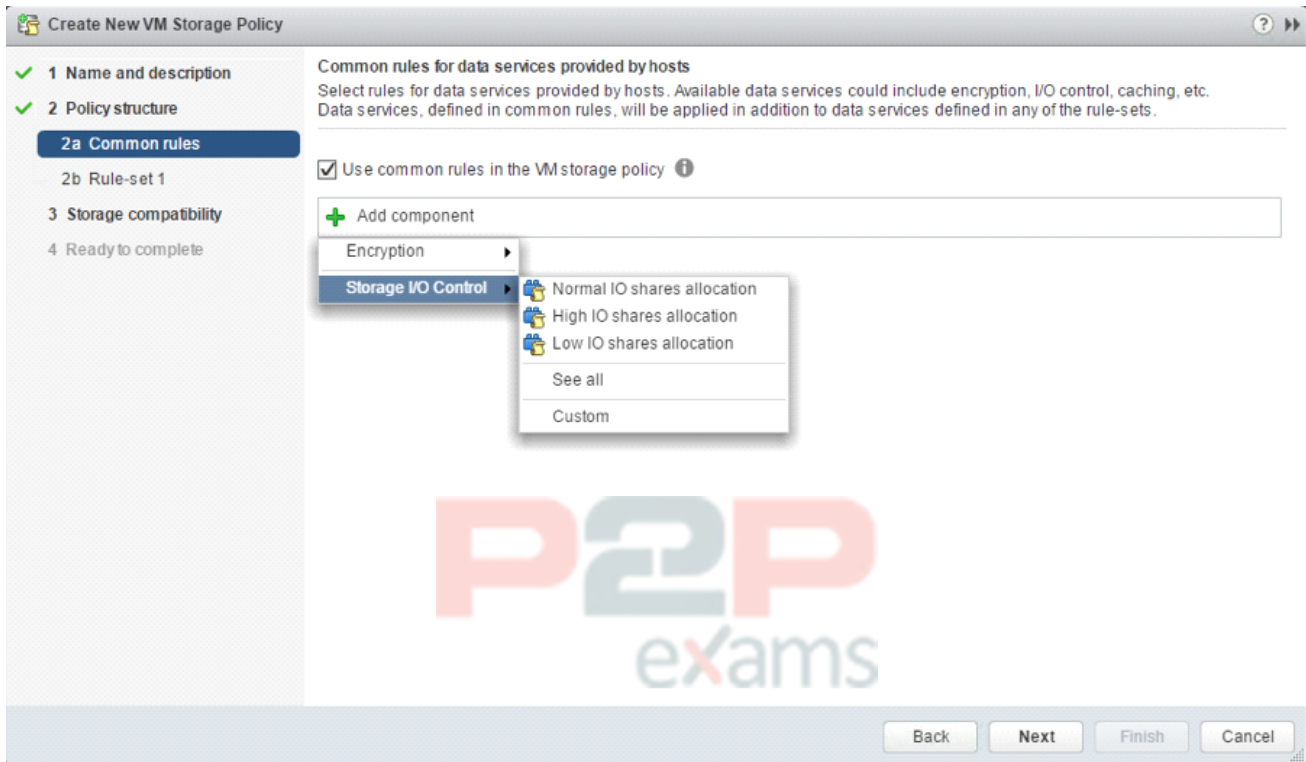

This table describes the different Limits, Shares and Reservations associated with each setting:

HIGH

NORMAL

LOW

Limits

100,000

10,000

1,000

Reservation

100

50

10

Shares

2,000


1,000

500

When the policy has been created, it may be assigned to newly deployed VMs during provisioning, or to already existing VMs by assigning this new policy to the whole VM (or just an individual VMDK) by editing its settings. One thing to note is that IO Filter based IOPS does not look at the size of the IO. For example, there is no normalization so that a 64K IOP is not equal to 2 x 32K IOPS. It is a fixed value of IOPS irrespective of the size of the IO.

Custom Allocation

If neither of the values in the Normal, High, Low allocations is appropriate, there is the ability to create custom settings for these values. In a custom setting, IOPS limit and IOPS reservation are both set to -1, implying unlimited. These may be modified as required.

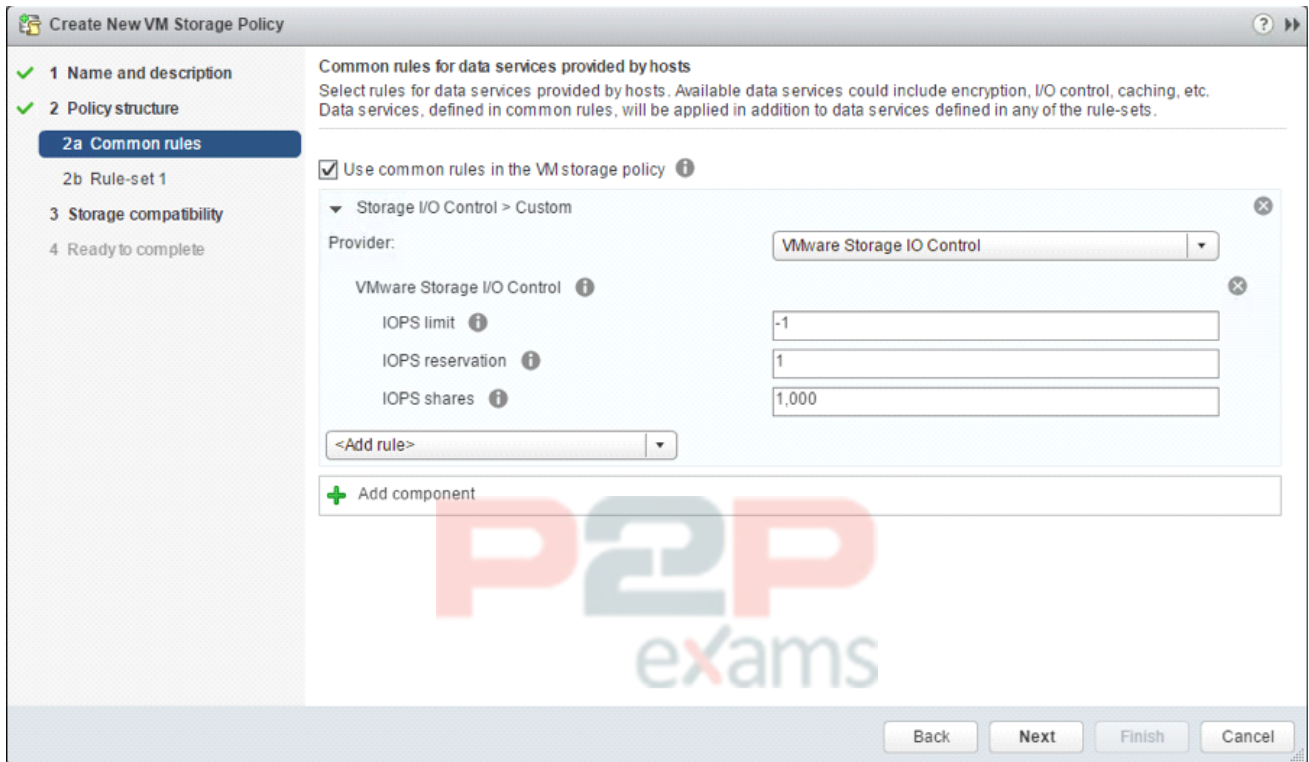

## Advanced Options

### SchedCostUnit

This is an advanced parameter that was created for SIOC V1 only. SIOC V2 does not have SchedCostUnit implemented. For V1, SchedCostUnit determines the unit size (normalized size) of an IO operation for scheduling, and it is currently a constant value of 32K. This constant value, however, may not satisfy different requirements from different customers. Some customers may want to set this unit size to 4K. Other customers may want to set it up to 256K.

To satisfy these different requirements, SchedCostUnit is now configurable. It defaults to an IO size value of 32K, and allowable values range between 4K to 256K.

The SchedCostUnit dictates how requests are counted. A request with size  $\leq$  SchedCostUnit counts as a single I/O. Anything greater than SchedCostUnit will be counted as 2 or more requests.

For example, by changing the SchedCostUnit from 32K to 64K, the number of IOPS observed will halve. The size of the IO can be set using the:

```
"esxcli system settings advanced set -o /Disk/SchedCostUnit -i 65536"
```

and verified by using the"

```
'esxcli system settings advanced list -o /Disk/SchedCostUnit'
```

command. SIOC V2 counts guest IO directly. IOPS will be counted based on IO count, regardless of the IO size.

### SchedReservationBurst

When limits are set on VMDKs, requests could have high average latency because the limit was enforced at a high (per request) granularity. This was due to the strict enforcement on a VM getting its share of IOs in interval of 1 second/L, where L is the user specified limit. The issue is more visible in fast storage, such as flash arrays. It was noted that SIOC V2 did not perform well when presented with a "bursty" workload on fast storage.

This SchedReservationBurst setting relaxes that constraint so a VM get its share of IOs at any time during a 1 second window, rather than enforce strict placement of IOs in intervals of 1/L.

BURST option is turned-on by default.

SIOC V2 Limitations

In this initial release of SIOC V2 in vSphere 6.5, there is no support for vSAN or Virtual Volumes. SIOC v2 is only supported with VMs that run on VMFS and NFS datastores.

Answer:

---

A

## Question 6

---

Question Type: MultipleChoice

---

As a member of the virtual infrastructure team, you have been tasked with creating a new guest customization specification and deploying a test virtual machine from an existing legacy template migrated from an old VMware VI3 environment

To complete this task:

Deploy a new virtual machine with the name VM-GuestCust to esxi02a.vclass.local in cluster PROD-A using the following details:

vCenter Server: vcsa01a.vdass.local

Datastore: ProdDS01

Template; Core-Template

The virtual machine requires an additional network card with the type VMXNET3.

Create a new Guest Customization Spec with the name Custom-Spec using the following details:

Cust-Spec

Operating System: Windows Server 2008 R2

Registration Spec;

Name: vclass

Organization: VMware

The computer name must use the virtual machine name . Timezone must be set to America/Central Time

Network Specifications:

IPv4 and IPv6 are set to DHCP but require a static DNS entry of 172.20.10.10

The computer must join the domain vclass.local using the following credentials:

Username: administrator

Password: VMware1!

## Options:

---

### A- Explanation:

Select Menu > Policies and Profiles, and under Policies and Profiles, click VM Customization Specifications.

Click the Create a new specification icon.

The New VM Guest Customization Specification wizard opens.

On the Name and target OS page, enter a name and description for the customization specification and select Windows as a target guest OS.

(Optional) Select the Generate a new security identity (SID) option and click Next.

A Windows Security ID (SID) is used in some Windows operating systems to uniquely identify systems and users. If you do not select this option, the new virtual machine has the same SID as the virtual machine or template from which it was cloned or deployed.

Duplicate SIDs do not cause problems when the computers are part of a domain and only domain user accounts are used. However, if the computers are part of a Workgroup or local user accounts are used, duplicate SIDs can compromise file access controls. For more information, see the documentation for your Microsoft Windows operating system.

On the Set Registration Information page, enter the virtual machine owner's name and organization and click Next.

On the Computer name page, enter a computer name for the guest operating system and a domain name.

The operating system uses the computer name to identify itself on the network. On Linux systems, it is called the host name.

Option

Action

Use the virtual machine name

Select this option to use the virtual machine name. The computer name that vCenter Server creates is identical to the name of the virtual machine on which the guest operating system is running. If the name exceeds 63 characters, it is truncated.

Enter a name in the Clone/Deploy wizard

Select this option to be prompted to enter a name during cloning or deployment.

Enter a name

Enter a name.

The name can contain alphanumeric characters and a hyphen (-). It cannot contain a period (.), blank spaces, or special characters, and cannot contain digits only. Names are not case-sensitive.

(Optional) To ensure that the name is unique, select the Append a numeric value check box.

This action appends a hyphen followed by a numeric value to the virtual machine name. The name is truncated if it exceeds 63 characters when combined with the numeric value.

Generate a name using the custom application configured with vCenter Server

Optional: Enter a parameter that can be passed to the custom application.

On the Windows license page, provide licensing information for the Windows operating system and click Next.

Option

Action

For nonsystem operating systems

Type the Windows product key for the new guest operating system.

For server operating systems

Type the Windows product key for the new guest operating system.

Select Include Server License Information.

Select either Per seat or Per server.

If you select Per server, enter the maximum number of simultaneous connections for the server to accept.

On the Set Administrator Password page, configure the administrator password for the virtual machine and click Next.

Enter a password for the administrator account and confirm the password by typing it again.

(Optional) Select the Automatically logon as Administrator check box to log users in to the guest operating system as Administrator, and select the number of times to log in automatically.

On the Time zone page, select the time zone for the virtual machine and click Next.

(Optional) On the Run Once page, specify commands to run the first time a user logs in to the guest operating system and click Next.

See the Microsoft Sysprep documentation for information about RunOnce commands.

On the Network page, select the type of network settings to apply to the guest operating system and click Next.

Select Use standard network settings so that vCenter Server configures all network interfaces from a DHCP server by using the default settings.

Select Manually select custom settings and configure each network interface yourself.

Select a network adapter from the list or add a new one.

For the selected NIC, click the vertical ellipsis icon and select Edit.

The Edit Network dialog box opens.

Click the IPv4 tab to configure the virtual machine to use IPv4 network.

You can configure all the settings at that stage or you can select the Prompt the user for an IPv4 address when the specification is used option. In that case, vCenter Server prompts for an IP address when you select to apply that customization specification during cloning or deployment.

With that option, you can also configure the gateways during cloning or deployment.

Click the IPv6 tab to configure the virtual machine to use IPv6 network.

You can configure all the settings at that stage or you can select the Prompt the user for an address when the specification is used option. In that case, vCenter Server prompts for an IP address when you select to apply that customization specification during cloning or deployment.

With that option, you can also configure the gateways during cloning or deployment.

Click the DNS tab to specify DNS server details.

Click WINS to specify primary and secondary WINS server information.

Click OK to close the Edit Network dialog box.

On the Set Workgroup or Domain page, select how the virtual machine participates in the

network and click Next.

Option

Action

Workgroup

Enter a workgroup name. For example, MSHOME.

Windows Server Domain

Enter the domain name.

To add a computer to the specified domain, enter the user name and password for a user account that has permission.

On the Ready to complete page, review the details and click Finish to save your changes.

Answer:

A



## Question 7

Question Type: MultipleChoice

Your team is experiencing intermittent issues with esxi01a and you have been asked to configure the host to export its syslog data to a preconfigured syslog collector.

To complete this task, you must:

- \* Configure esxi01a.vciass.local to send syslog events to an external syslog collector on 172.20.10.10.
- \* Ensure that the ESXi host security policies allow the syslog traffic to pass.

Options:

A- Send us your suggestions.



Answer:

A

## Question 8

Question Type: MultipleChoice

A new internal network is required to isolate virtual machines for security analysis. The virtual machine (honeypot-01) should reside on a new virtual standard switch with the ability for all

traffic on the switch to be monitored.

Add a new virtual switch to accommodate this requirement and configure (honeypot-01) to reside on this switch.

Use the following information to complete this task:

- \* ESXi host: esxi01a
- \* Standard Switch: Create a new Standard Switch
- \* Physical uplink: NO UPLINK
- \* Network Label: QUARANTINE
- \* VLAN: none specified



Options:

---

A- Send us your suggestions.

Answer:

---

A

## Question 9

---

Question Type: MultipleChoice

The current vSphere environment will be adding new ESXi hosts that will be used to create a QA compute cluster. This cluster should have HA properties specific to the workloads that will be running in it.

In preparation of adding the new hosts, create the new cluster. QA-Cluster in. Datacenter-PROD on vcsa01a.vclass.local with the following HA requirements:

- \* The cluster should not contain any ESXi hosts or VMs
- \* Hosts should be monitored.
- \* VMs should be restarted in the event of a host failure.
- \* VMs should be restarted if guest heartbeats are not detected.
- \* In the case of a host becoming isolated, shutdown and restart VMs.
- \* If there is an All Paths Down event, any affected VMs must be moved to another host.

\* Reserve 10% of memory and CPU for failover capacity.


## Part 2

You have been given a requirement for a virtual machine to have no downtime when an ESXi host failure occurs. Configure Fault Tolerance on VM1-FT in the PROD-B cluster. Use any compatible secondary host and datastore. Configure the following advanced cluster settings. Use SAN01 as the storage during configuration.

```
das.isolationaddress0 172.20.10.11
```

```
dass.ignoreRedundantNetWarning true
```

Note: ignore any related host, customer, or bandwidth warnings as long as fault tolerance is configured and VM1-FT is running.

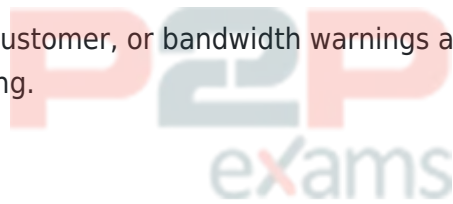

## Options:

---

A- Send us your suggestions.

## Answer:

---

A



To Get Premium Files for 3V0-22.21 Visit

<https://www.p2pexams.com/products/3v0-22.21>

For More Free Questions Visit

<https://www.p2pexams.com/vmware/pdf/3v0-22.21>

**20%**  
**DISCOUNT**

**P2P**  
exams